

WAAS CH 82508 W14A	APP CRS 142°	Rwy Ldg TDZE 23 Apt Elev 23
--	------------------------	---

RNAV (GPS) RWY 14

TREASURE COAST INTL (FPR)


⚠

Baro-VNAV NA when using Vero Beach altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). When VGSI inop, Straight-in/Circling Rwy 14 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility below 1 SM NA. When local altimeter setting not received, use Vero Beach altimeter setting and increase LPV DA to 303, LNAV/VNAV DA to 378 and all MDA 40 feet; increase LNAV visibility Cats C/D ¼ SM; increase Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:

Climb to 480 then climbing left turn to 2000 direct ANGEV and hold.

ATIS 134.825	PALM BEACH APP CON 132.8	FORT PIERCE TOWER ★ 128.2 (CTAF) 0	GND CON (GCO) 119.55
------------------------	------------------------------------	---	--------------------------------

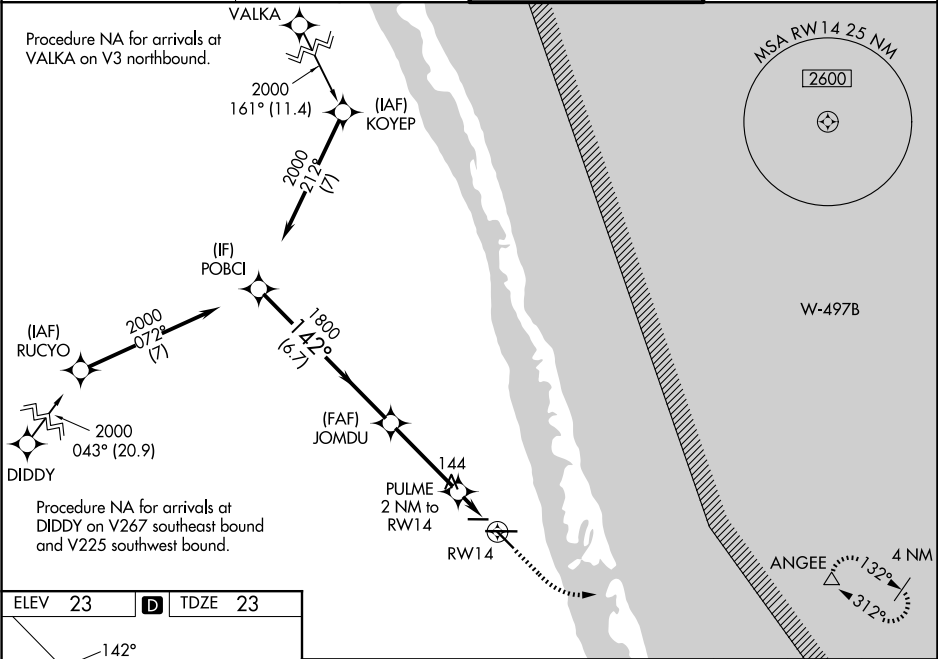

ELEV 23	D	TDZE 23
---------	----------	---------

142°

4000 X 7.5

28R

10L

6492 X 150

182

TWR

4755 X 100

SV

REIL Rwy 10R and 28L **0**
MIRL all Rwy **0**

480

2000

ANGEV

POBCI

2000

142°

JOMDU

1800

PULME 2 NM to RW14

RW14

*700

6.7 NM

3.4 NM

2 NM

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		280-1	257 (300-1)	
LNAV/VNAV DA		355-1½	332 (400-1½)	
LNAV MDA		400-1	377 (400-1)	
CIRCLING	460-1 437 (500-1)	480-1 457 (500-1)	880-2½ 857 (900-2½)	880-2¾ 857 (900-2¾)