


WAAS CH 86712 W13A	APP CRS 125°	Rwy Ldg TDZE 2119 Apt Elev 2120
--	------------------------	---

RNAV (GPS) RWY 13

VIRGINIA TECH/MONTGOMERY EXEC (BCB)

RNP APCH.		ODALS	MISSED APPROACH: Climb to 5400 direct ZASNO and hold, continue climb-in-hold to 5400.
Rwy 13 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats A and B.			
AWOS-3 133.325	ROANOKE APP CON 133.225 339.8	CLNC DEL 124.85	UNICOM 123.05 (CTAF) 0

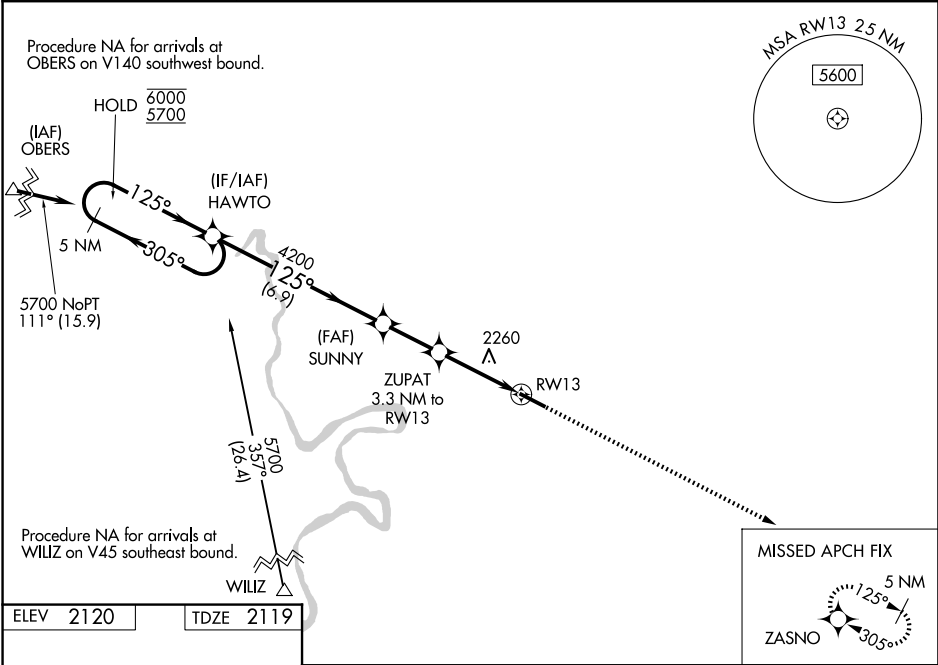

125° 5501 X 100		5 NM Holding Pattern HAWTO		5400 ZASNO
6000 5700 GP 3.44° TCH 55		SUNNY ZUPAT 3.3 NM to RWY 13 *0.9 NM to RWY 13 *3380		↑ * LNAV only
6.9 NM 2.2 NM 2.4 0.9				
CATEGORY	A	B	C	D
LPV DA	2389-1	270 (300-1)		NA
LNAV/VNAV DA	2419-1	300 (300-1)		NA
LNAV MDA	2520-1	401 (400-1)		NA
CIRCLING	2760-1 640 (700-1)	2820-1 700 (700-1)	2980-2½ 860 (900-2½)	NA