WAAS	APP CRS	Rwy Ldg	6904
CH 42738	017°	TDZE	24
W02A		Apt Elev	26

RNAV (GPS) RWY 2


PITT-GREENVILLE (PGV)


RNP APCH-GPS.

Baro-VNAV NA when using Washington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 50°C. Rwy 2 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Washington altimeter setting and increase LPV DA to 444 feet, visibility all Cats ⅛ SM; increase LNAV/VNAV DA to 661; increase all MDAs 60 feet, LNAV visibility Cat C and D and Circling Cat D ¼ SM. VDP NA when using Washington altimeter setting.

MISSED APPROACH: Climb to 2100 direct KENIR and hold.


AWOS-3PT	WASHINGTON CENTER	UNICOM
128.425	123.85 279.65	122.8 (CTAF) L

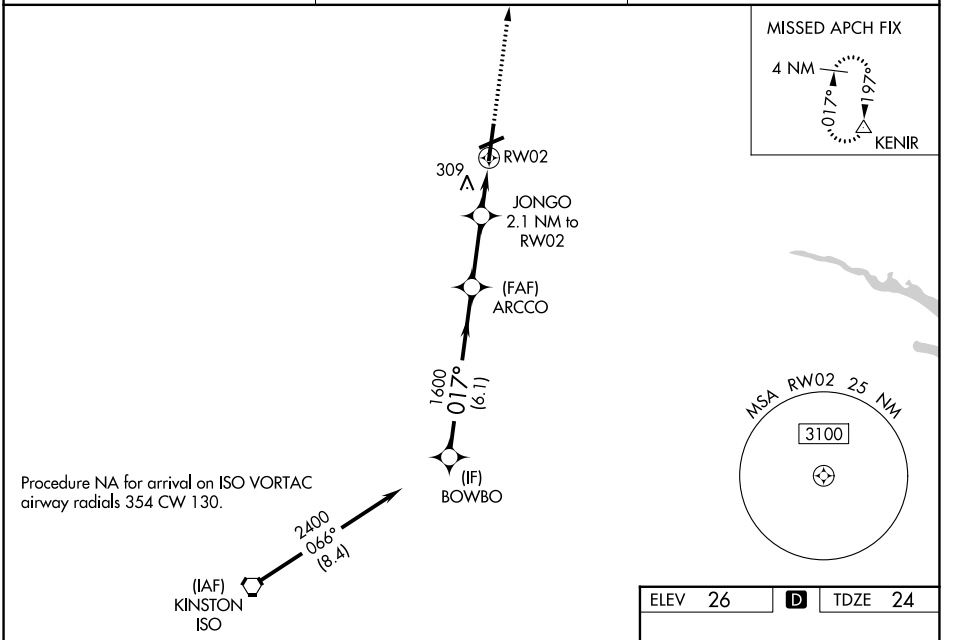

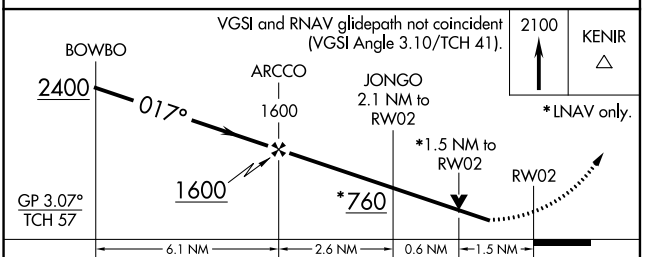

CATEGORY	A	B	C	D
LPV DA	403-1 379 (400-1)			
LNAV/VNAV DA	620-1¾ 596 (600-1¾)			
LNAV MDA	540-1 516 (600-1)		540-1⅜ 516 (600-1⅜)	
CIRCLING	600-1 574 (600-1)	620-1 594 (600-1)	700-2 674 (700-2)	800-2½ 774 (800-2½)

ELEV 26 D TDZE 24

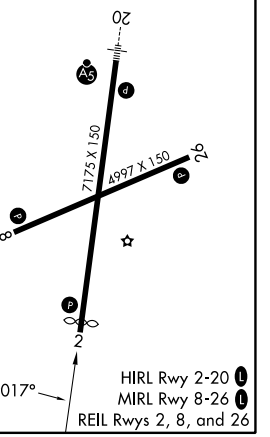

SE-2, 01 OCT 2026 to 29 OCT 2026
SE-2, 01 OCT 2026 to 29 OCT 2026