

WAAS CH 87038 W19A	APP CRS 188°	Rwy Ldg TDZE 685 Apt Elev 685
--	------------------------	---

RNAV (GPS) RWY 19


PICKAWAY COUNTY MEML (CYO)

RNP APCH


Baro-VNAV and VDP NA when using Rickenbacker Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Use Chillicothe altimeter setting, when not received use Rickenbacker Intl altimeter setting and increase LPV DA to 985 feet, LNAV/VNAV DA to 1150 feet, and all visibilities ¼ SM. Increase all MDAs 60 feet and Cats C and D visibility ¼ SM. Circling Rwy 1 NA at night. Rwy 19 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
RAJAH and hold.

RZT AWOS-3 119.225	COLUMBUS APP CON 134.0 279.6	UNICOM 122.7 (CTAF) 1
------------------------------	--	---------------------------------

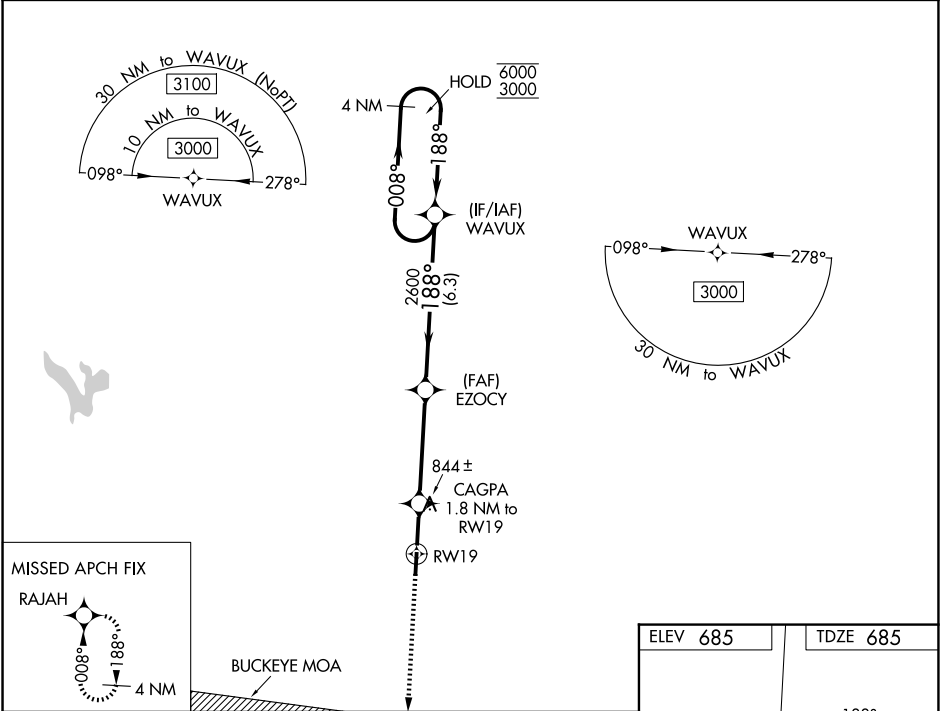

3000 RAJAH		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 24).		4 NM Holding Pattern
*LNAV only.		CAGPA 1.8 NM to RWY19		008° → 6000 ← 188° ← 3000
RWY19		EZOCY 2600		GP 3.00° TCH 40
1.2 NM		0.6 NM		6.3 NM
CATEGORY	A	B	C	D
LPV DA	935-7/8		250 (300-7/8)	
LNAV/VNAV DA	1100-13/8		415 (500-13/8)	
LNAV MDA	1100-1	415 (500-1)	1100-13/8	415 (500-13/8)
CIRCLING	1180-1 495 (500-1)	1200-1 515 (600-1)	1300-13/4 615 (700-13/4)	1340-2 655 (700-2)

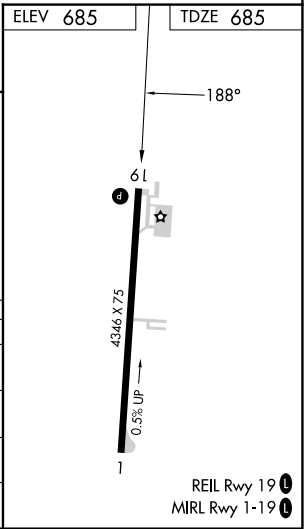

EC-2, 01 OCT 2026 to 29 OCT 2026

EC-2, 01 OCT 2026 to 29 OCT 2026