

WAAS CH 90424 W22A	APP CRS 220°	Rwy Ldg TDZE 35 Apt Elev 35
--	------------------------	---

RNAV (GPS) RWY 22


CONWAY-HORRY COUNTY (HYW)

RNP APCH.

Rwy 22 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 22 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 500 then climbing left turn to 1900 direct MARFE and hold.

AWOS-3 119.525	MYRTLE BEACH APP CON ★ 127.4 257.95	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

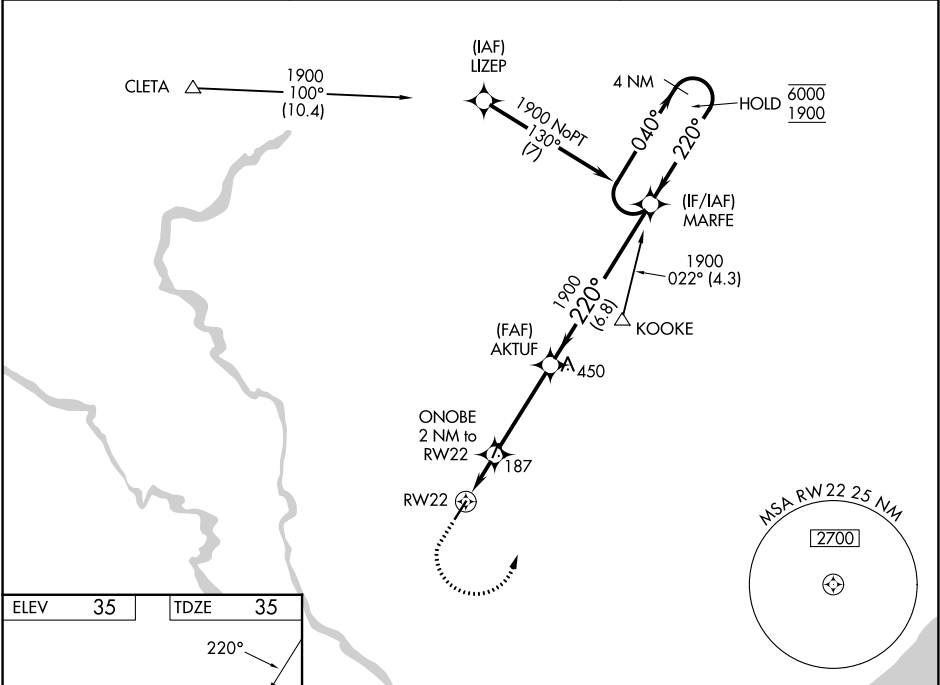

ELEV 35 TDZE 35

220°

440' X 25'

REIL Rwy 4 and 22

MIRL Rwy 4-22 0

500	1900	MARFE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).		4 NM Holding Pattern
*LNAV only.		ONOBE 2 NM to RWY 22	AKTUF 1900	MARFE	6000 1900
RWY 22		700*	220°	040°	GP 3.00° TCH 40
2 NM		3.7 NM	6.8 NM		
CATEGORY	A	B	C	D	
LPV DA	285-1		250 (300-1)		
LNAV/VNAV DA	438-1½		403 (500-1½)		
LNAV MDA	440-1	405 (500-1)	440-1½	405 (500-1½)	
CIRCLING	520-1 485 (500-1)	540-1 505 (600-1)	700-1¾ 665 (700-1¾)	700-2 665 (700-2)	