

WAAS CH 82538 W35A	APP CRS 354°	Rwy Ldg TDZE 1223 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 35

GEORGE L SCOTT MUNI (3Y2)

RNP APCH.


▼

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decorah altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Decorah altimeter setting and increase LPV DA to 1524 all Cats and all visibilities ½ mile, LNAV/VNAV DA to 1773 all Cats and all visibilities ½ mile; increase all MDA 60 feet and LNAV Cat C visibility ¼ mile.


MISSED APPROACH:
Climb to 3000 direct CADJU and hold.

MINNEAPOLIS CENTER 118.85	UNICOM 122.8 (CTAF) 0
-------------------------------------	---------------------------------

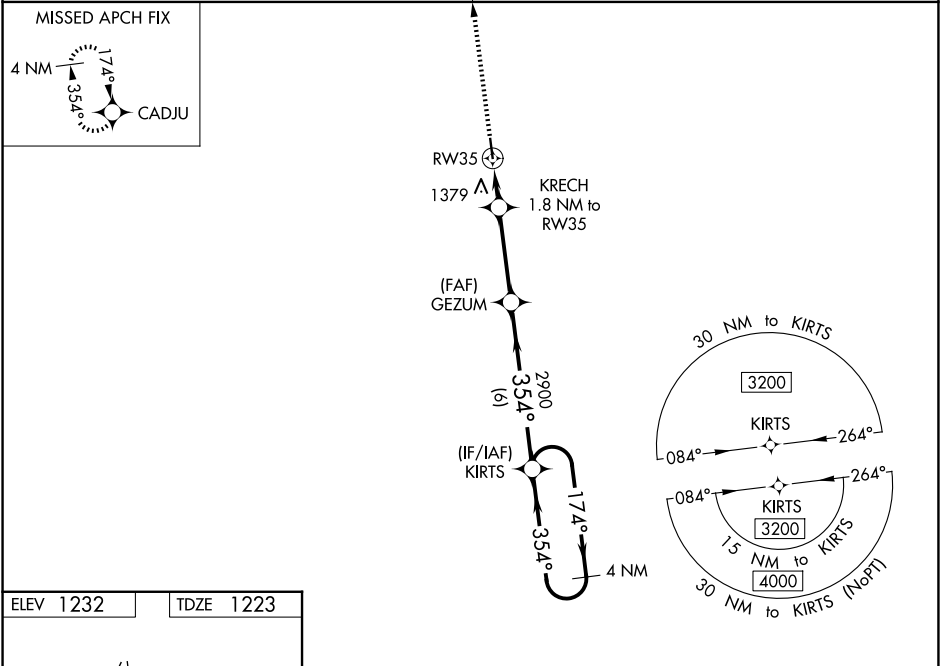

ELEV 1232	TDZE 1223
-----------	-----------

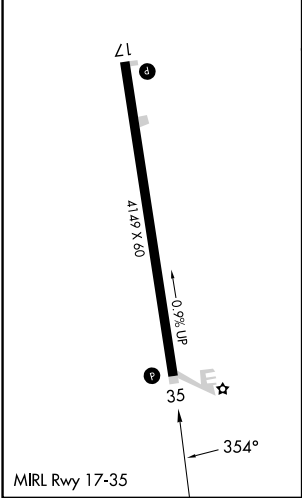

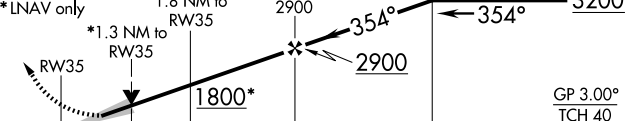3000 ↑	CADJU 	KIRTS 4 NM Holding Pattern		
* LNAV only		KRECH 1.8 NM to RW35	GEZUM 2900	174° → 3200 ← 354°
		GP 3.00° TCH 40		
CATEGORY	A	B	C	D
LPV DA	1473-1 250 (300-1)			NA
LNAV/VNAV DA	1722-1 ⁷ / ₈ 499 (500-1 ⁷ / ₈)			NA
LNAV MDA	1640-1 417 (500-1)		1640-1 ¹ / ₈ 417 (500-1 ¹ / ₈)	NA
CIRCLING	1740-1 508 (600-1)		1860-1 ³ / ₄ 628 (700-1 ³ / ₄)	NA

NC-3, 01 OCT 2026 to 29 OCT 2026

NC-3, 01 OCT 2026 to 29 OCT 2026