RNAV (GPS) RWY 14

CHEROKEE COUNTY (JSO)


WAAS	APP CRS	Rwy Ldg	5006
CH 56429	135°	TDZE	678
W14A		Apt Elev	678

TAA


Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase all DA to 1046 feet and increase LPV visibility ⅛ SM and LNAV/VNAV visibility ¼ SM; increase all MDA 120 feet and LNAV visibility Cat C ⅜ SM, Circling visibility Cat C ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Nacogdoches altimeter setting.

MISSED APPROACH: Climb to 3100 direct NOPCI and hold.


AWOS-3PT	LONGVIEW APP CON ★	UNICOM
119.075	128.75 379.15	122.7 (CTAF) L

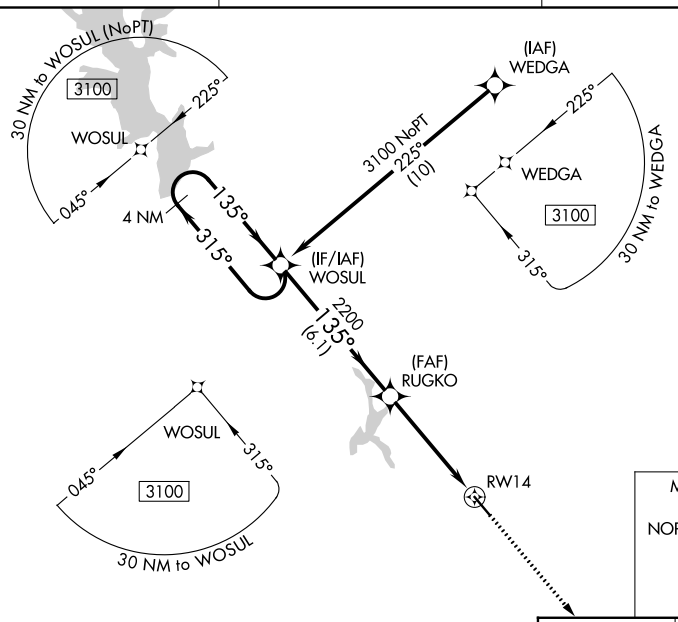

ELEV 678 TDZE 678

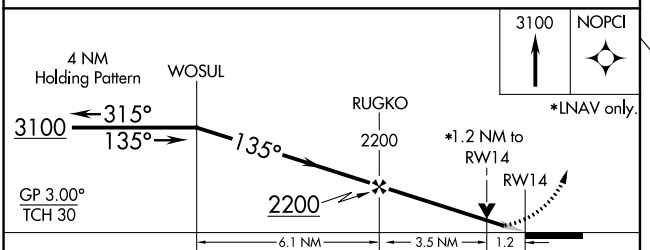

CATEGORY	A	B	C	D
LPV DA	928-1 250 (300-1)			NA
LNAV/VNAV DA	928-1 250 (300-1)			NA
LNAV MDA	1080-1 402 (500-1)		1080-1⅛ 402 (500-1⅛)	NA
CIRCLING	1080-1 402 (500-1)	1140-1 462 (500-1)	1280-1¾ 602 (700-1¾)	NA

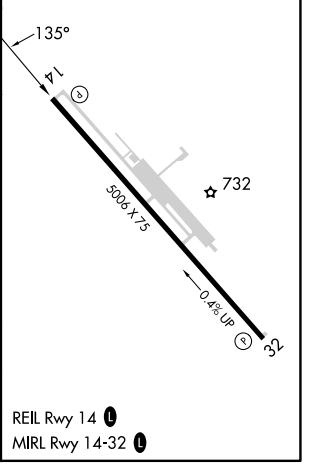

REIL Rwy 14 L

MIRL Rwy 14-32 L

SC-5, 01 OCT 2026 to 29 OCT 2026
SC-5, 01 OCT 2026 to 29 OCT 2026