
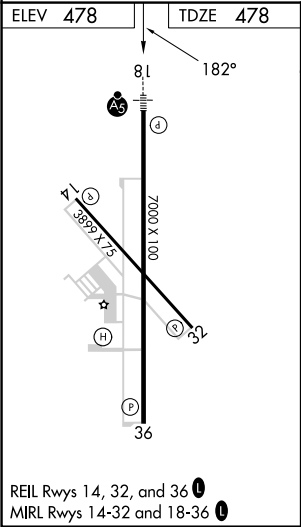


WAAS CH 82426 W18A	APP CRS 182°	Rwy Ldg TDZE Apt Elev	7000 478 478
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

CLARK RGNL (JVY)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 900 then climbing left turn to 3100 direct EATTN and hold.
⚠ Circling NA for Cat D southwest of Rws 14 and 36. Circling Rwy 14, 32, 36 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to 1 SM.			
AWOS-3T 118.575	LOUISVILLE APP CON 132.075 327.0	CLNC DEL 118.05	UNICOM 122.7 (CTAF) 0

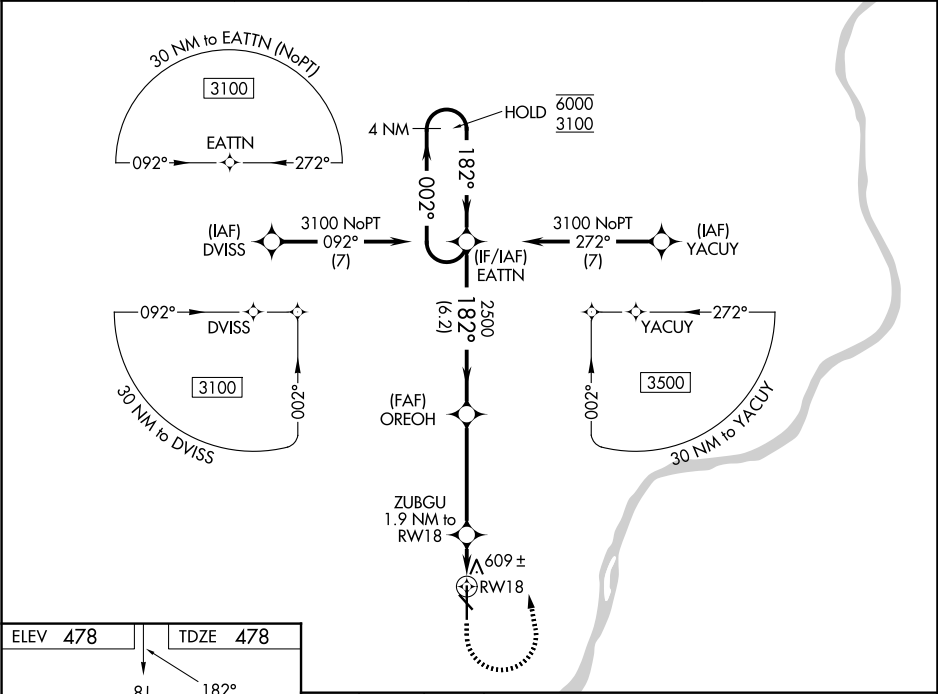

900 3100 EATTN		ZUBGU 1.9 NM to RW18		OREOH 2500		EATTN 4 NM Holding Pattern	
1 NM to RW18		1120		2500		GP 3.00° TCH 51	
CATEGORY		A		B		C	
LPV DA		678-1/2		200 (200-1/2)			
LNAV/VNAV DA		852-5/8		374 (400-5/8)			
LNAV MDA		860-1/2		382 (400-1/2)		860-5/8 382 (400-5/8)	
CIRCLING		1000-1 522 (600-1)		1040-1 562 (600-1)		1060-1 582 (600-1 1/2)	
						1100-2 622 (700-2)	