

WAAS CH 42737 W27A	APP CRS 271°	Rwy Ldg TDZE Apt Elev	5001 733 738
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27

RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)



⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1⁄8 mile and LNAV and Circling Cats C/D visibility 1⁄4 mile. Baro-VNAV and VDP NA when using Champaign Urbana altimeter setting. Helicopter visibility reduction below 1⁄4 SM NA.

MISSED APPROACH:
Climb to 3000 direct LEVVI and hold.

AWOS-3 119.025	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 123.0 (CTAF) 0
--------------------------	---	--

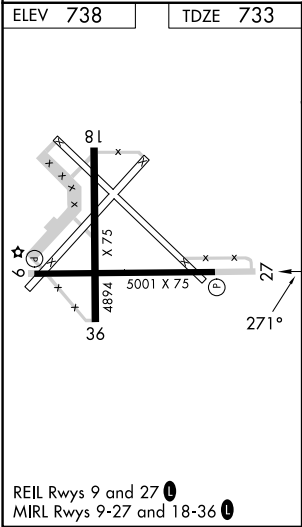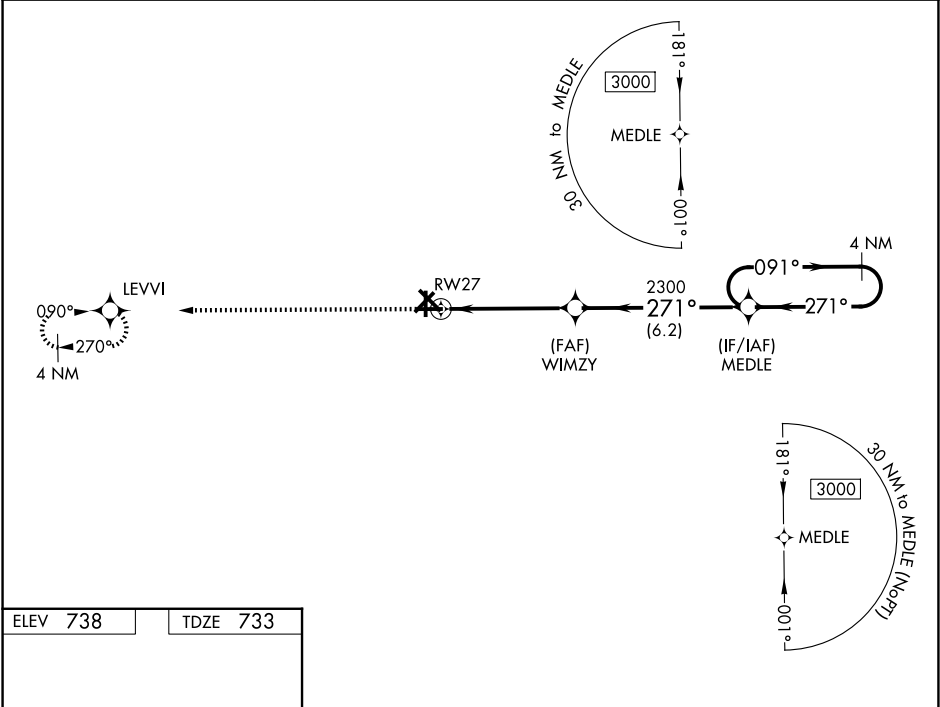

	3000	LEVVI			
				WIMZY	MEDLE
				2300	2300
				1.5 NM	3.3 NM
				1.5 NM	6.2 NM
					4 NM Holding Pattern
					091° → 3000
					← 271°
					GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA		983-1	250 (300-1)		
LNAV/VNAV DA		1029-1	296 (300-1)		
LNAV MDA	1240-1	507 (600-1)	1240-1 3⁄8	507 (600-1 3⁄8)	
CIRCLING	1240-1	1280-1	1380-1 3⁄4	1420-2 1⁄4	
	502 (600-1)	542 (600-1)	642 (700-1 3⁄4)	682 (700-2 1⁄4)	