

WAAS CH 48937 W31A	APP CRS 304°	Rwy Ldg TDZE Apt Elev	3300 992 993
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31

GLENCOE MUNI (GYL)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Hutchinson altimeter setting. When local altimeter setting not received, use Hutchinson altimeter setting: increase LPV DA to 1285 feet; increase LNAV/VNAV DA to 1296 feet; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3000 direct AKIRE and hold.

AWOS-3 119.625	MINNEAPOLIS APP CON 134.7 284.7	UNICOM 122.8 (CTAF) 0
--------------------------	---	--

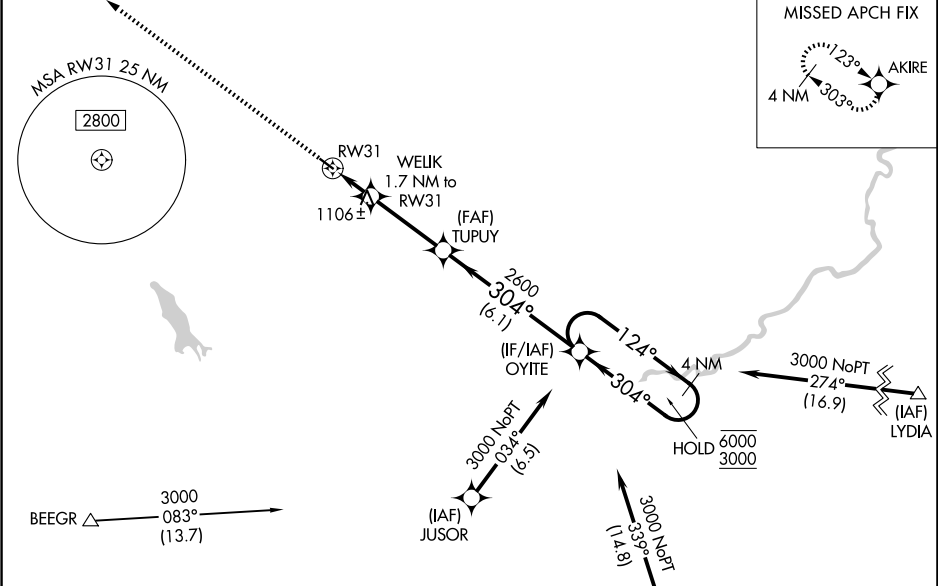

ELEV 993	TDZE 992
-----------------	-----------------

3000

AKIRE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).

WELIK

1.7 NM to RW31

TUPUY

2600

OYITE

4 NM Holding Pattern

124°

304°

6000

3000

GP 3.00°

TCH 40

1.1 NM

0.6

3.2 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	1242-7/8	250 (300-7/8)	NA	
LNAV/VNAV DA	1253-7/8	261 (300-7/8)	NA	
LNAV MDA	1360-1	368 (400-1)	NA	
CIRCLING	1420-1 427 (500-1)	1480-1 487 (500-1)	NA	

REIL Rwy 13 and 31

MIRL Rwy 13-31