| WAAS | APP CRS | Rwy Ldg | 4098 |
|---|---|---|---|
| CH 48917 | 225° | TDZE | 1424 |
| W22A | | Apt Elev | 1425 |

# RNAV (GPS) RWY 22


## ALEXANDRIA RGNL/CHANDLER FLD (AXN)

RNP APCH.


Baro-VNAV NA when using Glenwood altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. When local altimeter setting not received, use Glenwood altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LNAV/VNAV all Cats and LNAV Cat D visibility ¼ mile. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3500 direct MOVSE and right turn on track 315° to EVDEQ and on track 024° to TILER and hold.


| ASOS | MINNEAPOLIS CENTER | UNICOM |
|---|---|---|
| 118.375 | 126.1 269.2 | 123.0 (CTAF) L |

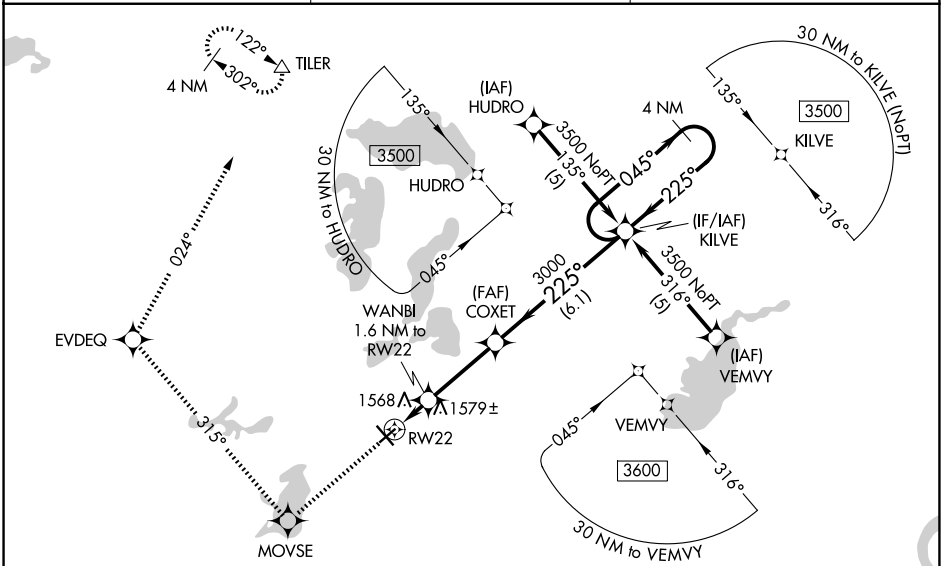


ELEV 1425 TDZE 1424




REIL Rwys 4, 13, and 22 L
MIRL Rwys 4-22 and 13-31 L

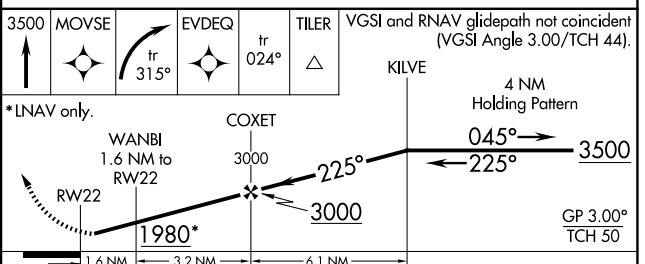


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 1677-1 253 (300-1) | | | |
| LNAV/VNAV DA | 1880-1½ 456 (500-1½) | | | |
| LNAV MDA | 1840-1 416 (500-1) | | 1840-1¼ 416 (500-1¼) | |



NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026