# RNAV (GPS) RWY 35

## BIG SPRING/MC MAHON-WRINKLE (BPG)


| WAAS | APP CRS | Rwy Ldg | 8803 |
|---|---|---|---|
| CH 99418 | 355° | TDZE | 2563 |
| W35A | | Apt Elev | 2573 |

RNP APCH - GPS.

Baro-VNAV and VDP NA when using MAF altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 43°C. When local altimeter setting not received, use MAF altimeter setting: increase LPV DA to 2943 feet; increase LNAV/VNAV DA to 3109 feet and all visibilities ⅛ SM; increase all MDAs 140 feet and LNAV visibility Cat C ⅜ SM and LNAV visibility Cat D ¼ SM.


MISSED APPROACH: Climb to 5200 direct YALUT and hold.


| AWOS-3PT | FORT WORTH CENTER | UNICOM |
|---|---|---|
| 118.025 | 133.7 350.2 | 122.8 (CTAF) L |

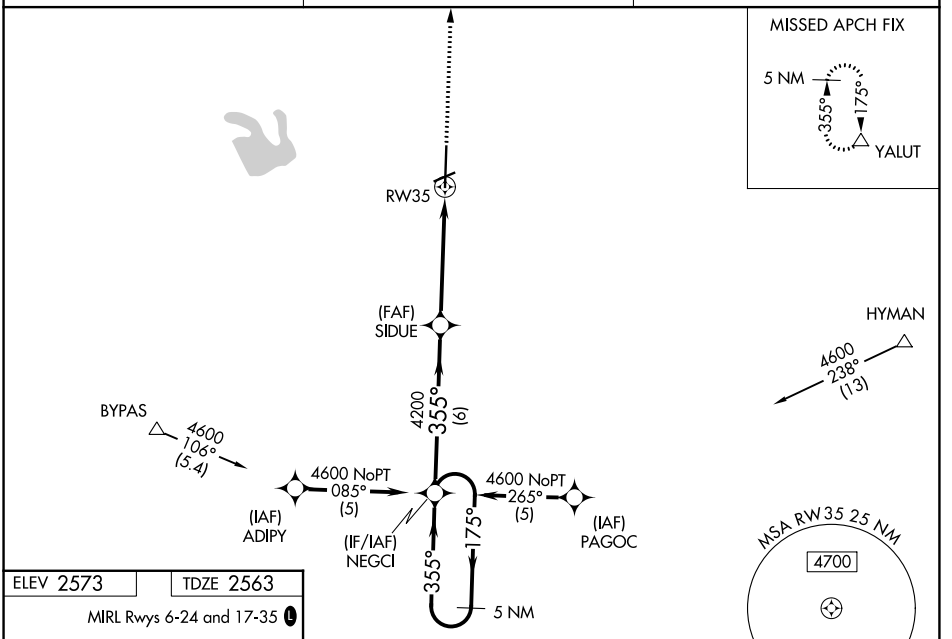


ELEV 2573 TDZE 2563

MIRL Rwys 6-24 and 17-35 L

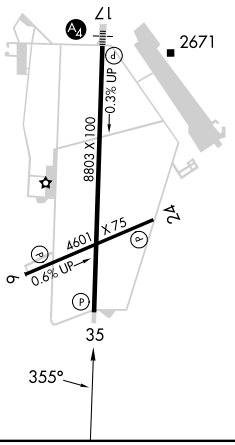

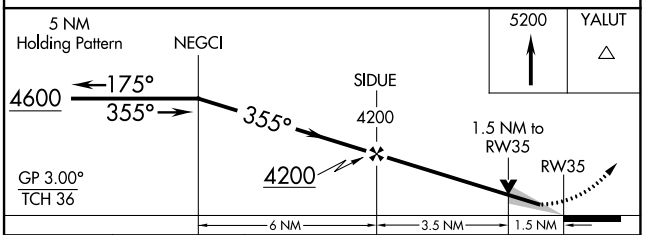
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 2813-1 250 (300-1) | | | |
| LNAV/VNAV DA | 2979-1½ 416 (500-1½) | | | |
| LNAV MDA | 3060-1 497 (500-1) | | 3060-1⅜ 497 (500-1⅜) | 3060-1½ 497 (500-1½) |



SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026