RNAV (GPS) Y RWY 13R

DALLAS LOVE FLD (DAL)

WAAS	APP CRS	Rwy Ldg	8310
CH 97747	133°	TDZE	479
W13B		Apt Elev	487


RNP APCH - GPS.

RADAR required for procedure entry.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct ECOTO and on track 114° to DUMPY and hold.

D-ATIS	LONE STAR APP CON	LOVE TOWER	GND CON
120.15	124.3 282.275 (N) 125.2 343.65 (S)	123.7 239.3	121.75 348.6

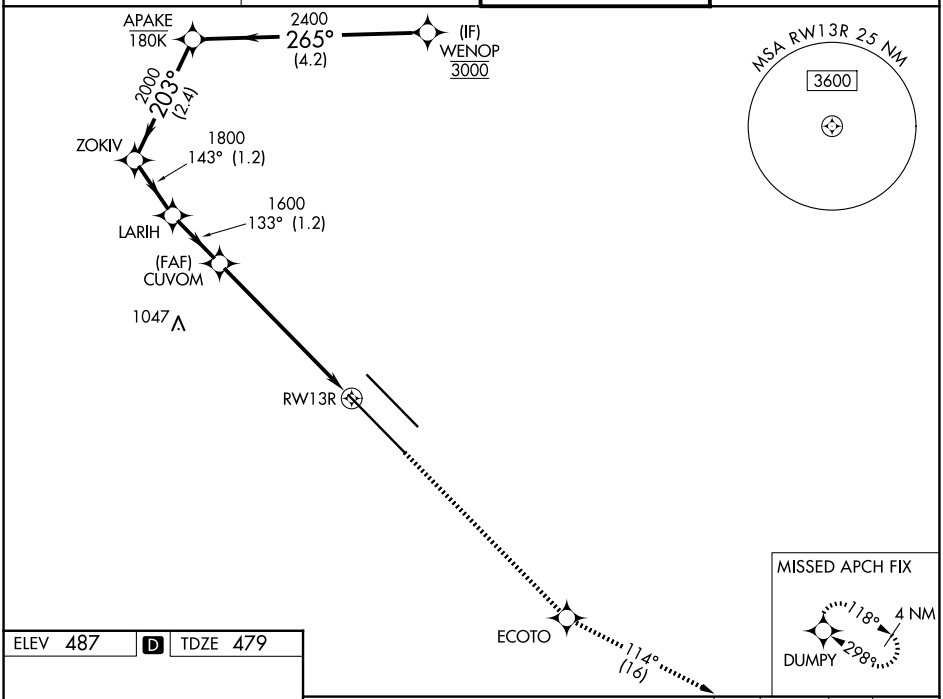


ELEV 487 D TDZE 479

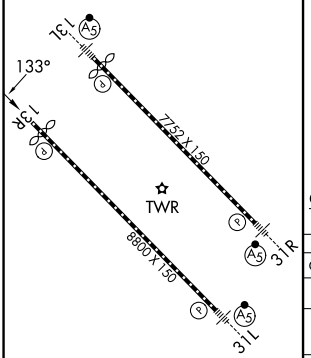

TDZL/RCLS Rwys 13L and 31L
HIRL Rwys 13L-31R, and 13R-31L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

3000	ECOTO	tr 114°	DUMPY

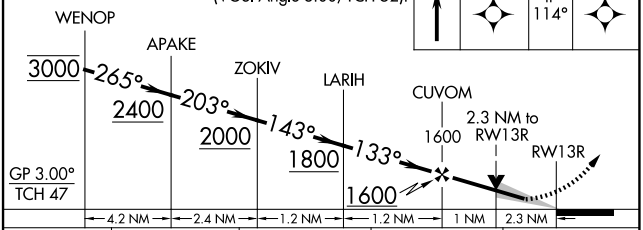

CATEGORY	A	B	C	D
LPV DA	679/40		200 (200-¾)	
LNAV/VNAV DA	831/55		352 (400-1)	
LNAV MDA	1280/55 801 (800-1)	1280-1¼ 801 (800-1¼)	1280-2½	801 (800-2½)
CIRCLING	1280-1 793 (800-1)	1280-1¼ 793 (800-1¼)	1280-2½ 793 (800-2½)	1520-3 1033 (1100-3)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026