WAAS	APP CRS	Rwy Ldg	7001
CH 50414	241°	TDZE	1007
W24A		Apt Elev	1009

RNAV (GPS) RWY 24L

JAMES M COX DAYTON INTL (DAY)


RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats RVR to 4500. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 3000 direct WANSU and on track 227° to MIMMS and hold.

ATIS	COLUMBUS APP CON	DAYTON TOWER	GND CON
125.8	118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	119.9 257.7	121.9

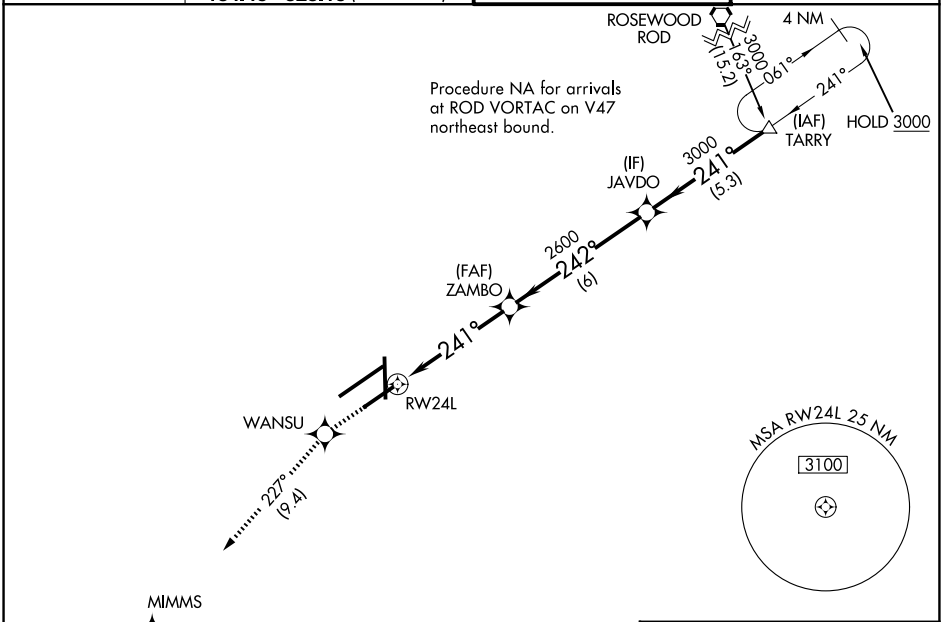


3000	WANSU	tr 227°	MIMMS

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 54).

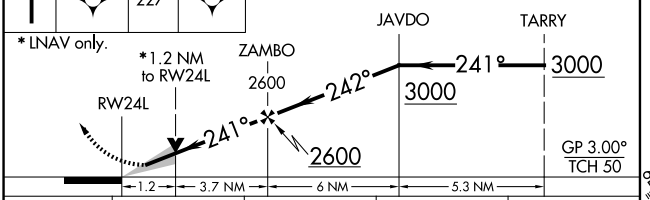

CATEGORY	A	B	C	D
LPV DA**	1207/24 200 (200-½)			
LNAV/VNAV DA	1327/24 320 (400-½)			
LNAV MDA	1440/24 433 (500-½)		1440/40 433 (500-¾)	
CIRCLING	1580-1 571 (600-1)		1580-1½ 571 (600-1½)	1640-2 631 (700-2)

ELEV 1009 D TDZE 1007



HIRL all Rwys
TDZL/RCLS Rwy 6L
REIL Rwys 6R and 36

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026