WAAS	APP CRS	Rwy Ldg	9010
CH 60911	163°	TDZE	570
W16B		Apt Elev	608

RNAV (GPS) Y RWY 16R


SEATTLE PAINE FLD INTL (PAE)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). Circling Rwy 34R NA at night. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV Cats A/B visibility to RVR 5000.

MALSR


MISSED APPROACH: Climb to 1100 then climbing right turn to 2000 direct ECEPO and hold.

ATIS	SEATTLE APP CON	PAINE TOWER★	GND CON	UNICOM
128.65	128.5 306.9	132.95 (CTAF) L 256.7	121.8 339.8	122.95

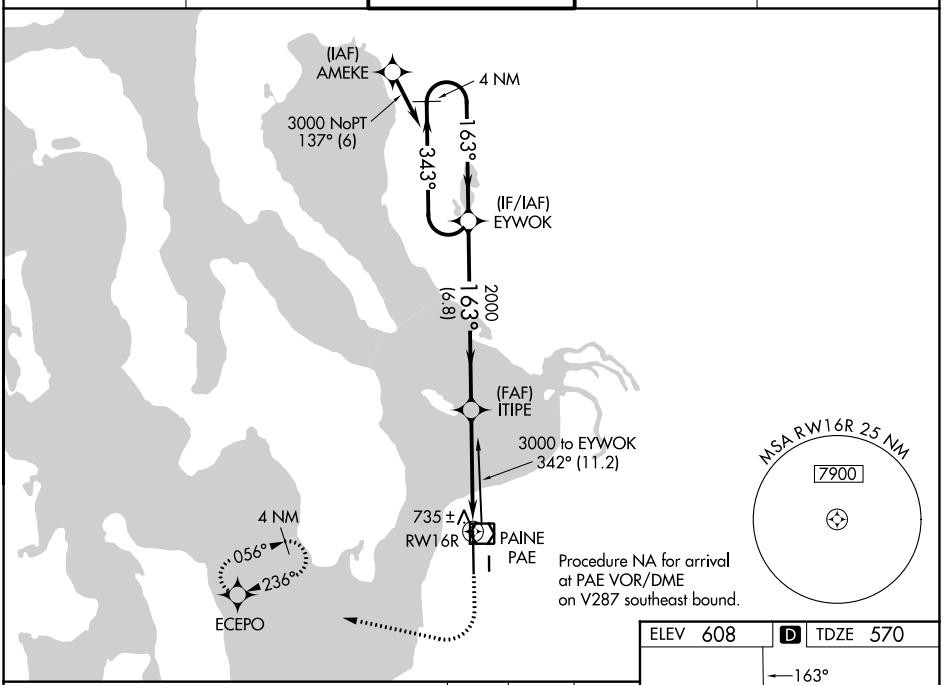

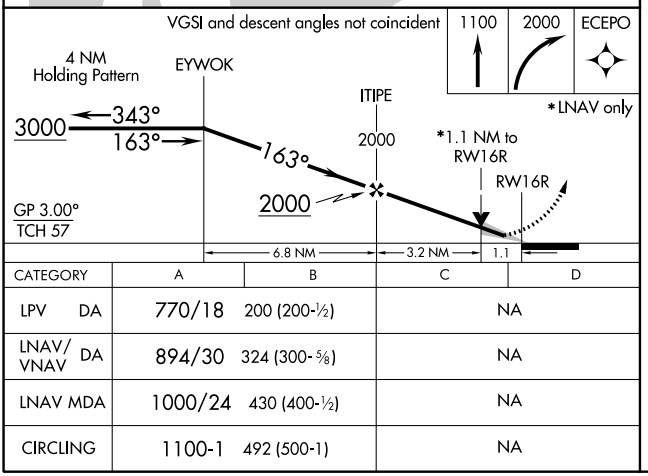

CATEGORY	A	B	C	D
LPV DA	770/18	200 (200-½)	NA	
LNAV/VNAV DA	894/30	324 (300-⅝)	NA	
LNAV MDA	1000/24	430 (400-½)	NA	
CIRCLING	1100-1	492 (500-1)	NA	

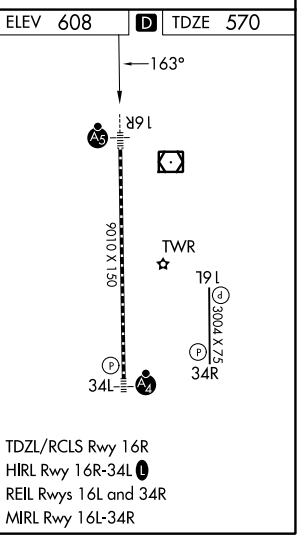

TDZL/RCLS Rwy 16R
HIRL Rwy 16R-34L L
REIL Rwys 16L and 34R
MIRL Rwy 16L-34R

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026