ILS RWY 10C (CAT II & III)

CHICAGO O'HARE INTL (ORD)

LOC/DME I-SXH	APP CRS	Rwy Ldg	10540
108.95	093°	TDZE	669
Chan 26(Y)		Apt Elev	680

From GIBNS: RNAV-1 GPS required.
RNAV 1-GPS or RADAR required for procedure entry. DME or RADAR required.
Simultaneous approach authorized. CAT II: RVR 1000 authorized with specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

ALSF-2

MISSED APPROACH: Climb to 4000 on heading 093° and CGT VORTAC R-336 to CGT VORTAC and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	120.75 348.0	124.125 (TWR NORTH)	121.75 (OBND)
			118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

ALTERNATE MISSED APCH FIX
114.55 DPA
081° 261°
R-081
Chan 92(Y)
BLUTO
DPA 41
RADAR

MSA ORD 25 NM
3400

NORTHBROOK
113.0 OBK
Chan 77

114.2 CGT
R-336
Chan 89

R-197

LOCALIZER 108.95
I-SXH
Chan 26(Y)

(IAF) GIBNS
BAIRY I-SXH 25.8 RADAR
COUPR I-SXH 22.6 RADAR
KYLAA I-SXH 19.5 RADAR
PEPAW I-SXH 16.4 RADAR
(IF) SHARN I-SXH 13.2 RADAR
RRUDA I-SXH 10.1 RADAR
RAYYY INT I-SXH 4.8 RADAR

273° 8000 093° (3.1) 7000 (3.1) 6000 (3.1) 5000 093° (3.1) 4000 (3.1) 2300 (5.3)
IM
844
9000
085° (20.3)

MISSED APCH FIX
CHICAGO HEIGHTS
CGT
114.2
Chan 89
156° 336° R-156

ELEV 680 D TDZ 669

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 75).

4000 hdg 093° CGT R-336 CGT


BAIRY I-SXH 25.8 RADAR
COUPR I-SXH 22.6 RADAR
KYLAA I-SXH 19.5 RADAR
PEPAW I-SXH 16.4 RADAR
SHARN I-SXH 13.2 RADAR
RRUDA I-SXH 10.1 RADAR
RAYYY INT I-SXH 4.8 RADAR

9000 093° 8000 7000 6000 5000 4000 2300 IM 770
GS 3.00°
TCH 55
2300

3.1 NM | 3.1 NM | 3.1 NM | 3.1 NM | 3.1 NM | 5.3 NM | 5 NM | 1091'

CATEGORY	A	B	C	D
S-ILS 10C	CAT II RA 102/12 100 DA 769			
S-ILS 10C	CAT III RVR 06			

CATEGORY II and III ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

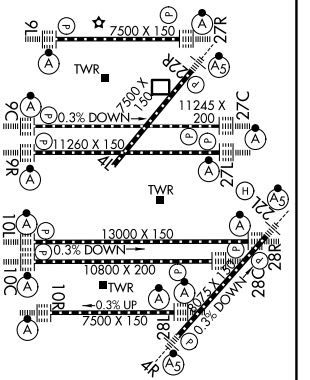

HIRL all rwys
TDZL/RCLS all rwys except 4L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026