ILS Z or LOC Z RWY 10R

CHICAGO O'HARE INTL (ORD)

LOC/DME I-IZJ	APP CRS	Rwy Ldg	7500
110.75	094°	TDZE	680
Chan 44 (Y)		Apt Elev	680

RNP APCH - GPS. From GIBNS.
DME or RADAR required. RADAR required for procedure entry at GIBNS.
Simultaneous approach authorized.
For inop ALS, increase S-LOC 10R Cat C and D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	133.0 348.0	124.125 (TWR NORTH)	121.75 (OBND)
			118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

ALTERNATE MISSED APCH FIX
JOLIET JOT 112.3 Chan 70
R-246-066° 246°


MSA ORD 25 NM
3400
113.0 OBK Chan 77
113.0 OBK R-185 Chan 77
R-196


(IAF) GIBNS
SAFLY I-IZJ 27.7 RADAR
POPOF I-IZJ 24.6 RADAR
DAYZE I-IZJ 21.4 RADAR
BNITO I-IZJ 18.3 RADAR
(IF) BOOTR I-IZJ 15.2 RADAR
NIRRA I-IZJ 12 RADAR
KUULA INT I-IZJ 6.5 RADAR
ALYEA INT I-IZJ 3.4 RADAR

8000 094° (3.1) 7000 094° (3.1) 6000 094° (3.1) 5000 094° (3.1) 4000 094° (3.2) 2300 094° (5.5)
274°
9000 087° (20.2)
834
IM

R-248 068° 248°
DUPAGE 114.55 DPA Chan 92(Y)

LOCALIZER 110.75 I-IZJ Chan 44(Y)

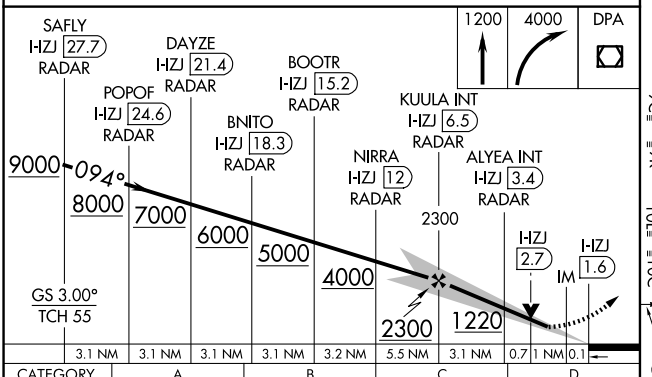

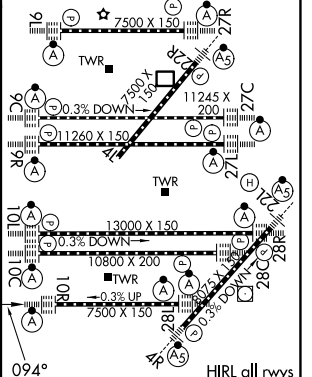

CATEGORY	A	B	C	D
S-ILS 10R	880/18 200 (200-½)			
S-LOC 10R	1100/24 420 (500-½)		1100/40 420 (500-¾)	

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026