APP CRS	Rwy Ldg	10000
050°	TDZE	791
	Apt Elev	796


RNAV (RNP) Z RWY 5R
INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS required. Simultaneous approach authorized, for arrivals from IIUUU only.

ALSF-2

MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 direct OZMOE and hold.

D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

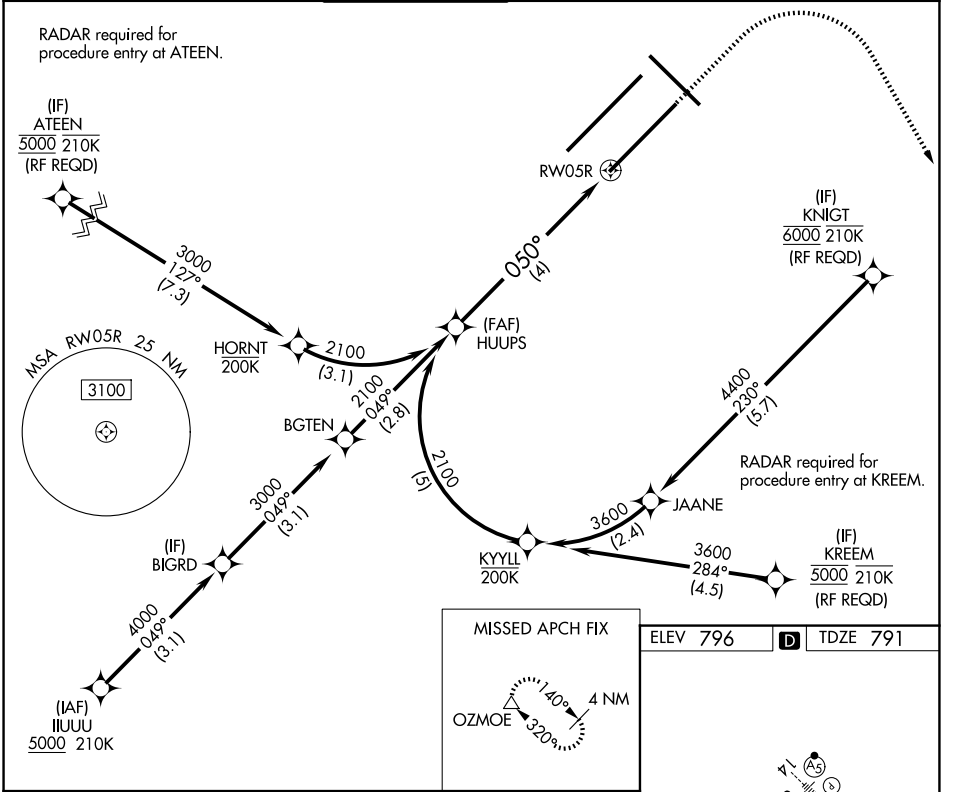



ELEV 796 D TDZE 791

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

1500	3000	OZMOE
		△

See planview for multiple IF locations.

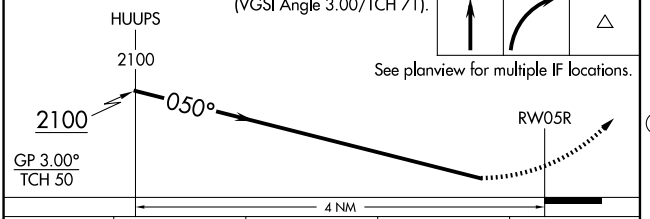



CATEGORY	A	B	C	D
RNP 0.11 DA	1174/45 383 (400-⅞)			
RNP 0.30 DA	1271/60 480 (500-1¼)			

AUTHORIZATION REQUIRED

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026