RNAV (GPS) RWY 9

TRI-COUNTY RGNL (LNR)

WAAS CH 78206 W09A	APP CRS 090°	Rwy Ldg 5000 TDZE 717 Apt Elev 717


RNP APCH.


V A -31°C

Circling Rwy 18, 36 NA at night. Baro-VNAV and VDP NA when using Dane County Rgnl-Truax Fld altimeter setting. Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received, use Dane County Rgnl-Truax Fld altimeter setting and increase LPV DA to 1104, LNAV/VNAV DA to 1769, and all MDA 120 feet. Increase LPV visibility all Cats ⅛ SM, LNAV visibility Cat C and Circling visibility Cat A ¼ SM, Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct CABIG and hold.


ASOS	MADISON APP CON ★	UNICOM
119.425	135.45 343.7	123.0 (CTAF) L

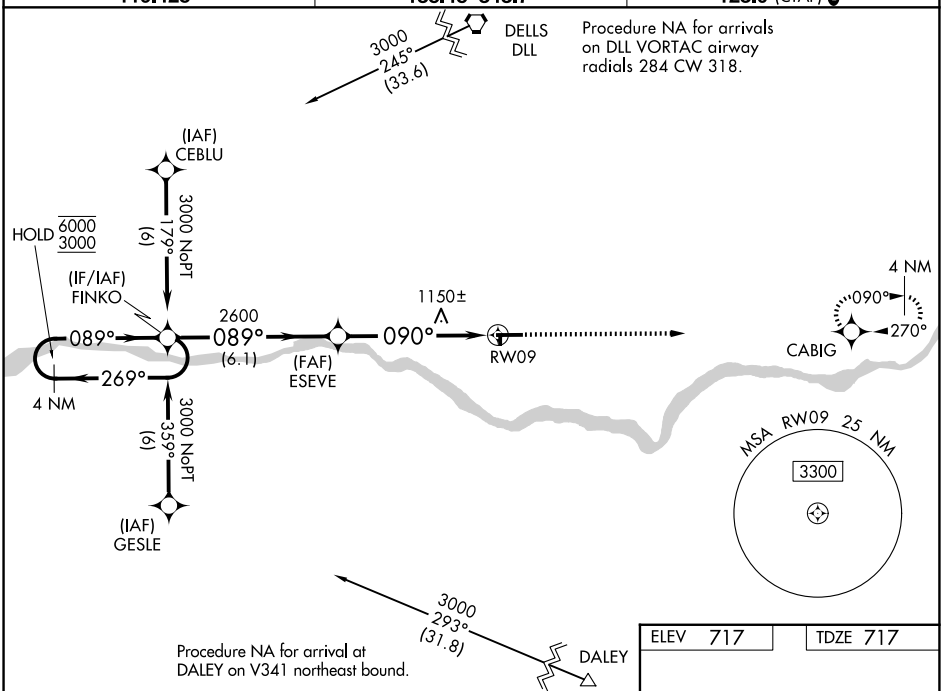

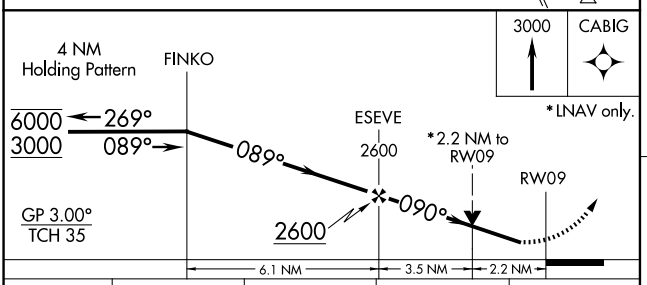

CATEGORY	A	B	C	D
LPV DA	994-1 277 (300-1)			NA
LNAV/VNAV DA	1659-4 942 (1000-4)			NA
LNAV MDA	1460-1 743 (800-1)	1460-1¼ 743 (800-1¼)	1460-2¼ 743 (800-2¼)	NA
CIRCLING	1520-1 803 (900-1)	1520-1¼ 803 (900-1¼)	1560-2½ 843 (900-2½)	NA

ELEV 717 TDZE 717



REIL Rwy 9 and 27 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026