ILS or LOC RWY 18

MYRTLE BEACH INTL (MYR)


LOC/DME I-MYR	APP CRS	Rwy Ldg	9503
109.5	177°	TDZE	23
Chan 32		Apt Elev	25

RNP APCH-GPS. From MULGN or CCYOU.
DME required. RADAR required for Cat E.
For inop ALS, increase S-ILS 18 Cat E visibility to RVR 4000 and S-LOC 18 Cats C/D/E visibility to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 700 then climbing right turn to 3000 on heading 279° and CRE VORTAC R-234 to PLANN/24 DME and hold, continue climb-in-hold to 3000.

ATIS	MYRTLE BEACH APP CON ★	MYRTLE BEACH TOWER ★	GND CON	UNICOM
123.925	127.4 257.95 (171° - 321°) 119.2 350.3 (322° - 170°)	128.45 (CTAF) L 259.3	120.3 275.8	122.95

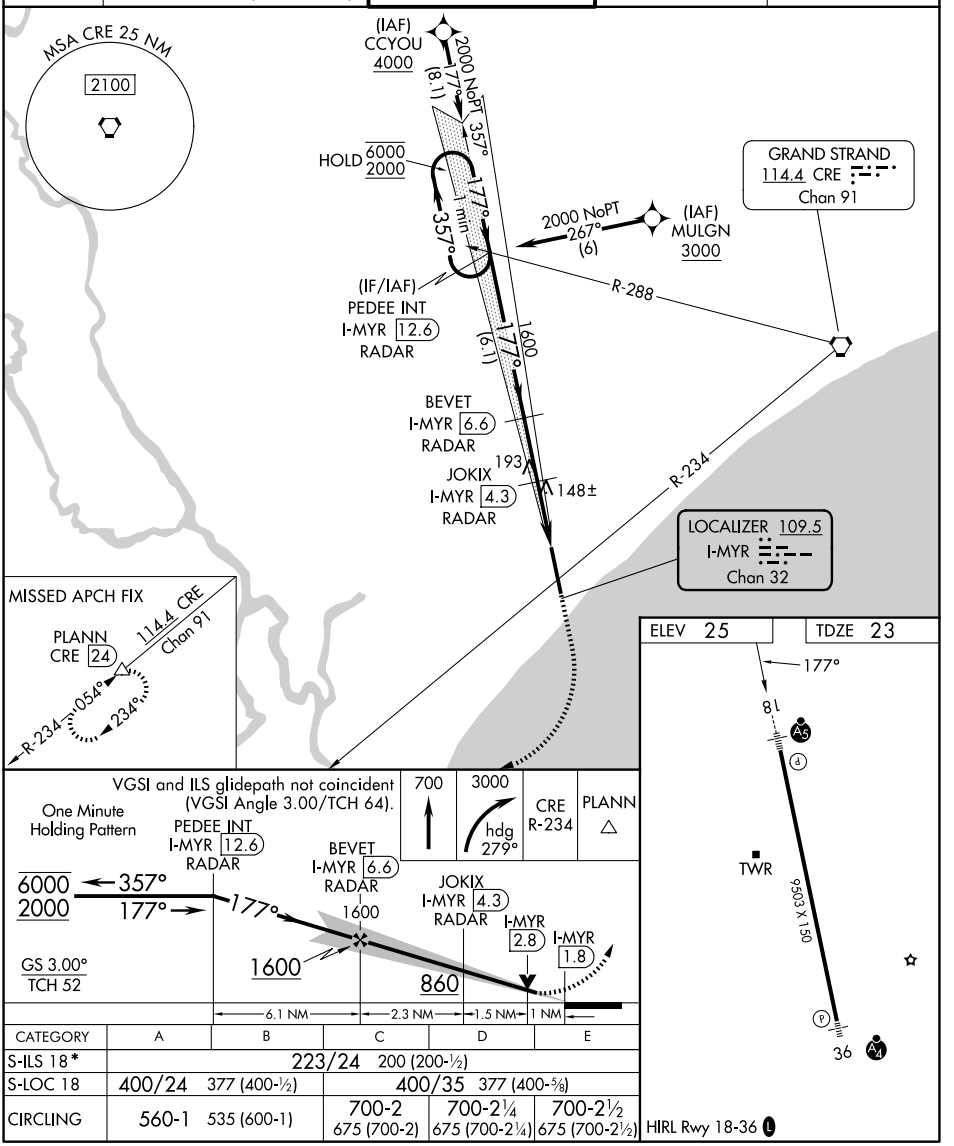

CATEGORY	A	B	C	D	E
S-ILS 18 *	223/24 200 (200-½)				
S-LOC 18	400/24 377 (400-½)		400/35 377 (400-⅝)		
CIRCLING	560-1 535 (600-1)		700-2 675 (700-2)	700-2¼ 675 (700-2¼)	700-2½ 675 (700-2½)

SE-2, 29 OCT 2026 to 26 NOV 2026