OLGUY THREE DEPARTURE (RNAV)

(OLGUY3.OLGUY) 07DEC17


OKLAHOMA CITY, OKLAHOMA
OKC WILL ROGERS INTL (OKC)


D-ATIS
125.85
CLNC DEL
124.35
GND CON
121.9 348.6
ROGERS TOWER
119.35 269.45
OKE CITY DEP CON
124.6 266.8

TAKEOFF MINIMUMS:
Rwys 13, 17L/R, 18, 31, 35L/R, 36:
Standard with minimum climb of 500′ per NM to 1800.

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TOP ALTITUDE: Assigned by ATC



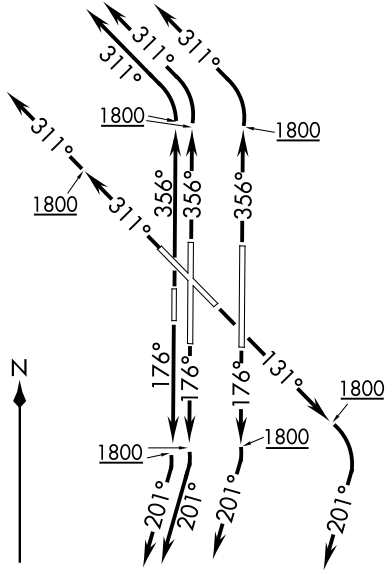

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to BEEDI, thence . . . .
TAKEOFF RWYS 17L/R, 18: Climb heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to BEEDI, thence . . . .
TAKEOFF RWY 31: Climb heading 311° to 1800, then heading 311° or as assigned by ATC, expect RADAR vectors to BEEDI, thence . . . .
TAKEOFF RWYS 35L/R, 36: Climb heading 356° to 1800, then left turn heading 311° or as assigned by ATC, expect RADAR vectors to BEEDI, thence . . . .

. . . . on track 267° to OLGUY, then on (transition). Maintain 5000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

GRUVN TRANSITION (OLGUY3.GRUVN):
YOUSE TRANSITION (OLGUY3.YOUSE):

NOTE: Chart not to scale.

OLGUY THREE DEPARTURE (RNAV)

(OLGUY3.OLGUY) 24305

AL-301 (FAA)

OKLAHOMA CITY, OKLAHOMA
OKC WILL ROGERS INTL (OKC)