ILS or LOC RWY 18L

NORTH TEXAS RGNL/PERRIN FLD (GYI)

LOC I-GYI	APP CRS	Rwy Ldg	9000
111.7	179°	TDZE	741
		Apt Elev	749


ADF required.

T A NA Circling Rwy 18R, 36L NA at night. Autopilot coupled approach NA below 1900. For inop ALS, increase S-LOC-18L Cat C/D visibility to 1⅜ SM.


MALSR A5

MISSED APPROACH: Climb to 2000 then climbing left turn to 2800 direct DNI NDB and hold.

ATIS	FORT WORTH CENTER	NORTH TEXAS TOWER ★	GND CON
118.775	124.75 323.0	120.575 (CTAF) L 233.7	124.125

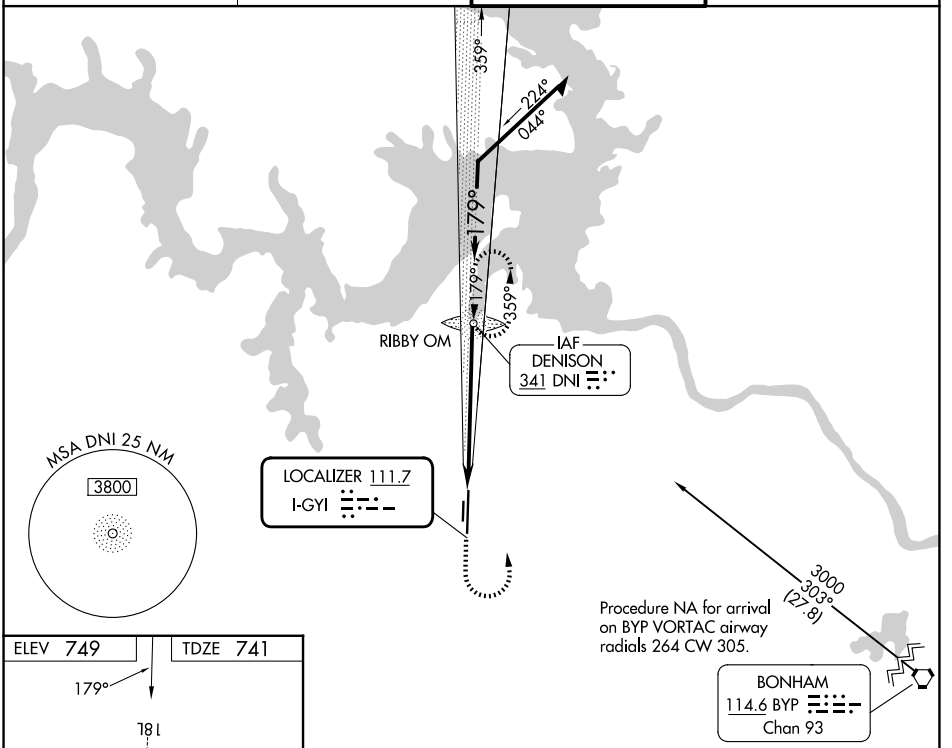


ELEV 749 TDZE 741

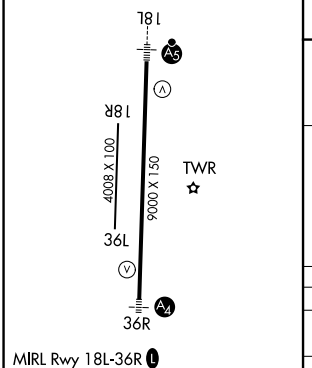

MIRL Rwy 18L-36R L

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

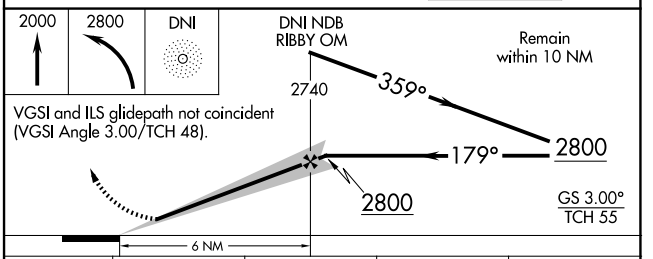

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 48).

CATEGORY	A	B	C	D
S-ILS 18L	941-½ 200 (200-½)			
S-LOC 18L	1220-½ 479 (500-½)		1220-1 479 (500-1)	
CIRCLING	1300-1 551 (600-1)		1400-1¾ 651 (700-1¾)	1540-2½ 791 (800-2½)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026