# ILS or LOC RWY 17

OLYMPIA RGNL (OLM)


| LOC I-OLM | APP CRS | Rwy Ldg | 5500 |
|---|---|---|---|
| 111.9 | 176° | TDZE | 207 |
| | | Apt Elev | 208 |

DME or RADAR required. For inop ALS, increase S-LOC 17 Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1400 then climb to 5500 on OLM VORTAC R-176 to CETRA INT/OLM 15 DME and hold, continue climb-in-hold to 5500.

| ATIS | SEATTLE APP CON | OLYMPIA TOWER★ | GND CON | UNICOM |
|---|---|---|---|---|
| 135.725 | 121.1 290.9 | 124.4 (CTAF) L 254.25 | 121.6 | 122.95 |

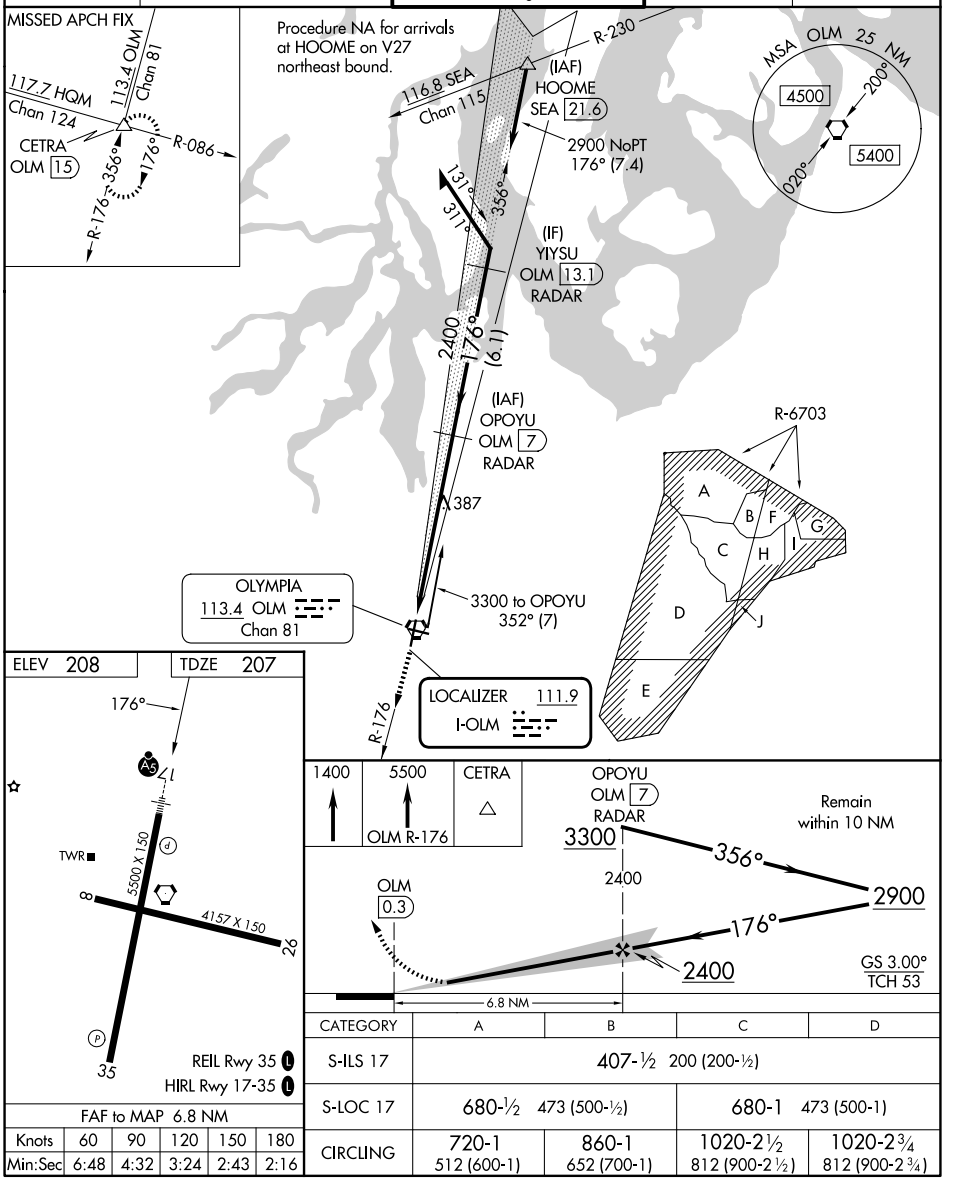


FAF to MAP 6.8 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 6:48 | 4:32 | 3:24 | 2:43 | 2:16 |

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 17 | 407-½ 200 (200-½) | | | |
| S-LOC 17 | 680-½ 473 (500-½) | | 680-1 473 (500-1) | |
| CIRCLING | 720-1 512 (600-1) | 860-1 652 (700-1) | 1020-2½ 812 (900-2½) | 1020-2¾ 812 (900-2¾) |



NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026