RNAV (GPS) RWY 28

MID-OHIO VALLEY RGNL (PKB)


WAAS	APP CRS	Rwy Ldg	4002
CH 61227	283°	TDZE	839
W28A		Apt Elev	859

RNP APCH.


Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Athens/Albany altimeter setting and increase all MDA 100 feet, increase LP/LNAV Cats C/D visibility ¼ SM and Circling Cat C/D ½ SM. Straight-in Rwy 28 NA at night, Circling Rwy 10, 28 NA at night.

MISSED APPROACH: Climb to 3000 direct FASAT and hold.


ATIS	INDIANAPOLIS CENTER	PARKERSBURG TOWER ★	GND CON	UNICOM
124.35	125.55 317.475	123.7 (CTAF) L 257.8	126.45	122.95

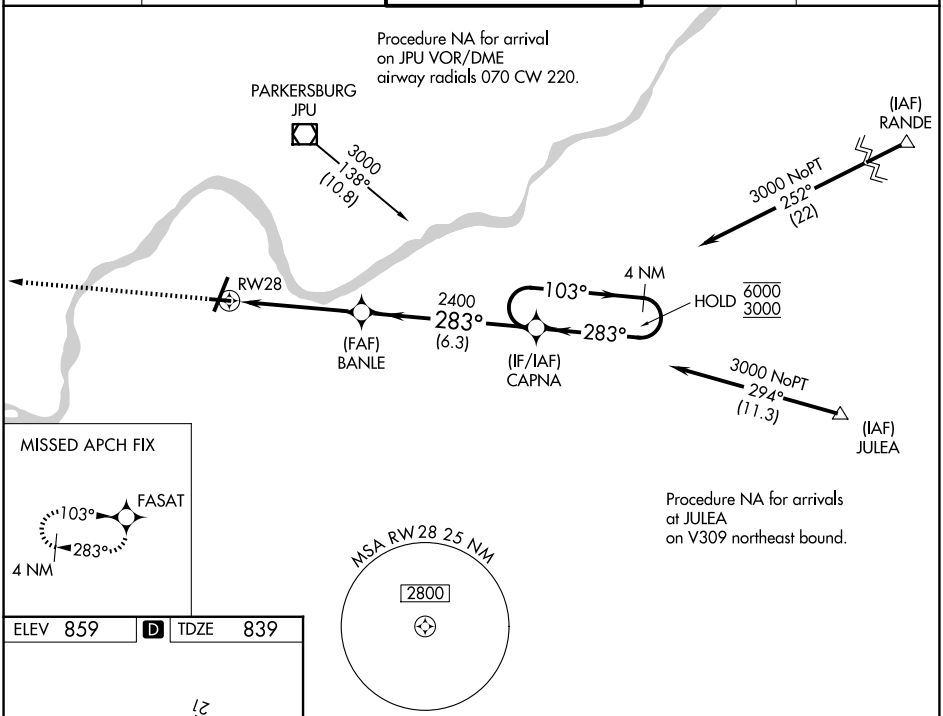

ELEV 859 D TDZE 839



REIL Rwy 28
HIRL Rwys 3-21 and 10-28 L
REIL Rwy 10, 21 L

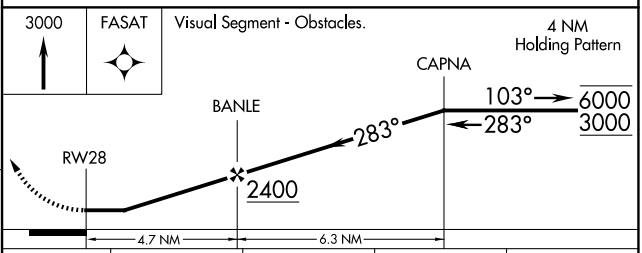

CATEGORY	A	B	C	D
LP MDA	1300-1 461 (500-1)		1300-1⅜ 461 (500-1⅜)	
LNAV MDA	1320-1 481 (500-1)		1320-1⅜ 481 (500-1⅜)	
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)

NE-4, 29 OCT 2026 to 26 NOV 2026
NE-4, 29 OCT 2026 to 26 NOV 2026