LOC/DME I-HVN	APP CRS	Rwy Ldg 5600
109.1	016°	TDZE 7
Chan 28		Apt Elev 13


ILS or LOC RWY 2
TWEED/NEW HAVEN (HVN)


Rwy 2 helicopter visibility reduction below RVR 4000 NA.
For inop ALS, increase S-ILS all Cats visibility to RVR 4500.


MALSF

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct MAD VOR/DME and hold.

ATIS	NEW YORK APP CON	NEW HAVEN TOWER ★	GND CON	UNICOM
133.65	124.075 343.65	124.8 (CTAF) L	121.7	122.95

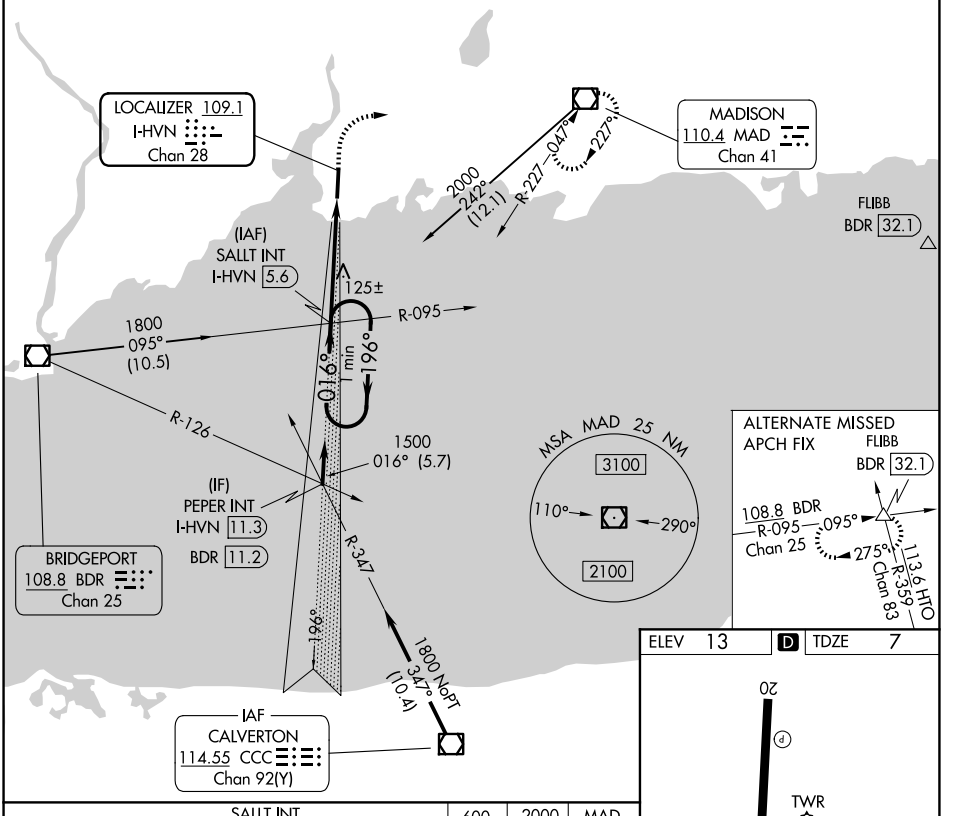

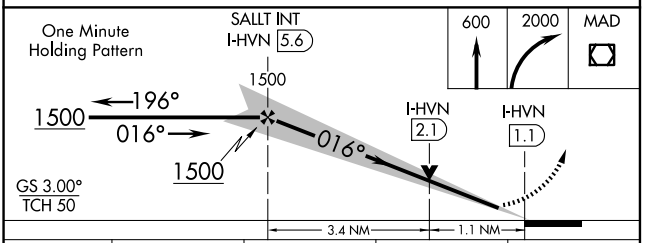

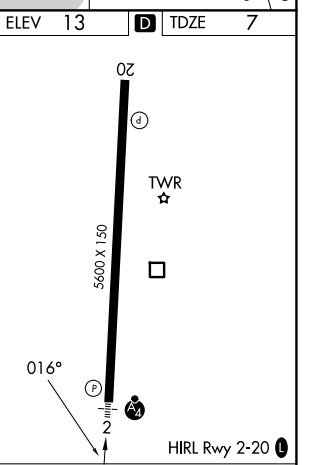

CATEGORY	A	B	C	D
S-ILS 2		294/40	287 (300-¾)	
S-LOC 2	400/40	393 (400-¾)	400/45	393 (400-⅞)
CIRCLING	720-1	707 (800-1)	780-2¼ 767 (800-2¼)	880-2¾ 867 (900-2¾)

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026