WAAS CH 45799 W06A	APP CRS 066°	Rwy Ldg 5019 TDZE 45 Apt Elev 54

RNAV (GPS) RWY 6


CAPE COD GATEWAY (HYA)

RNP APCH - GPS.


T A W Baro-VNAV NA below -15°C. Baro-VNAV NA when using Chatham altimeter setting. When local altimeter setting not received, use Chatham altimeter setting and increase LPV DA to 348 feet; increase LNAV/VNAV DA to 475 feet and increase LNAV/VNAV all Cats visibility ⅛ SM; increase all MDAs 40 feet; LNAV Cats C and D visibility ⅛ SM; Circling Cats C and D visibility ¼ SM. Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 6 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 1700 direct MECEJ and hold.


ATIS	BOSTON APP CON	HYANNIS TOWER ★	GND CON	UNICOM
123.8	118.2 284.6	119.5 (CTAF) L 257.8	118.45	122.95

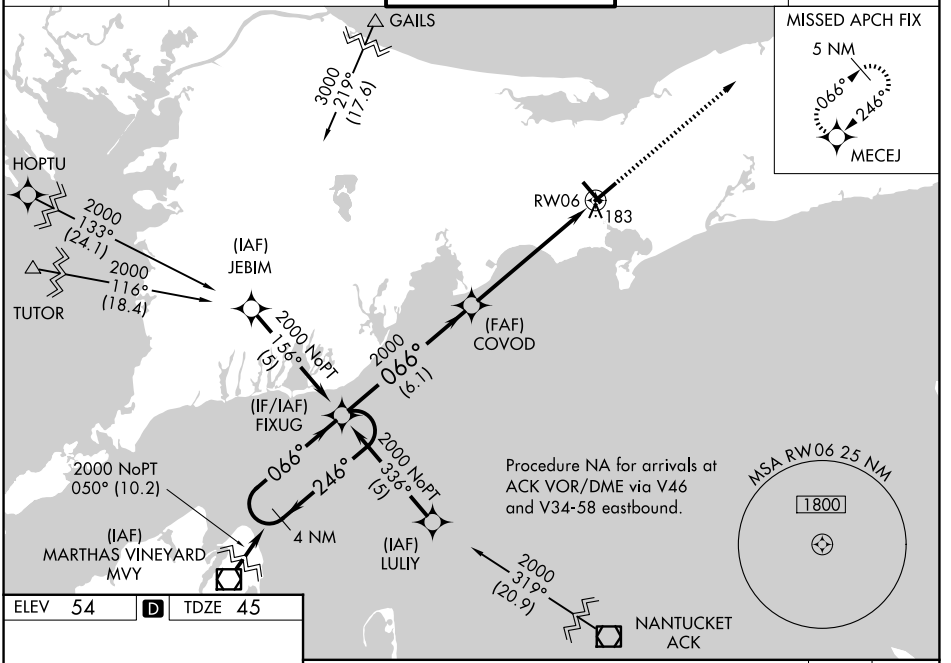

ELEV 54	D	TDZE 45



REIL Rwy 6
HIRL Rwys 6-24 and 15-33 L

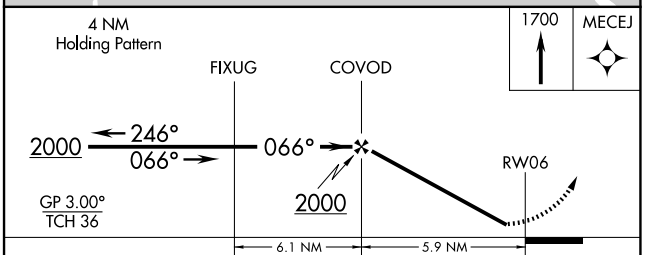

CATEGORY	A	B	C	D
LPV DA	316-1		271 (300-1)	
LNAV/VNAV DA	443-1½		398 (400-1½)	
LNAV MDA	480-1	435 (500-1)	480-1¼ 435 (500-1¼)	480-1½ 435 (500-1½)
CIRCLING	560-1 506 (600-1)	580-1 526 (600-1)	860-2¼ 806 (900-2¼)	860-2½ 806 (900-2½)

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026