RNAV (GPS) RWY 24

HICKORY RGNL (HKY)

WAAS CH 42921 W24A	APP CRS 241°	Rwy Ldg 6401 / TDZE 1190 / Apt Elev 1190


RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 5400 direct ZUGAT and hold, continue climb-in-hold to 5400.


ASOS	ATLANTA CENTER	HICKORY TOWER ★	GND CON
118.325	125.15 263.0	128.15 (CTAF) L	121.7

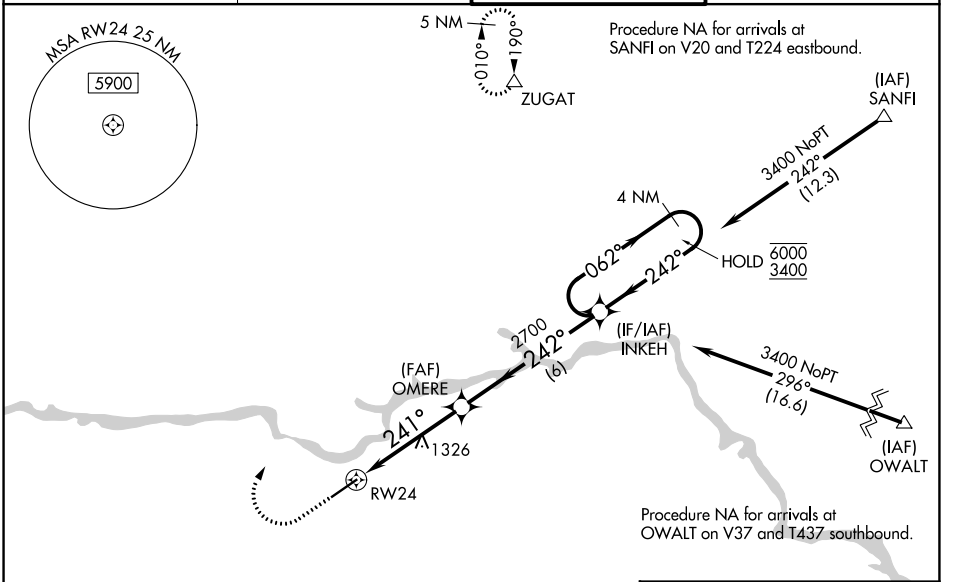

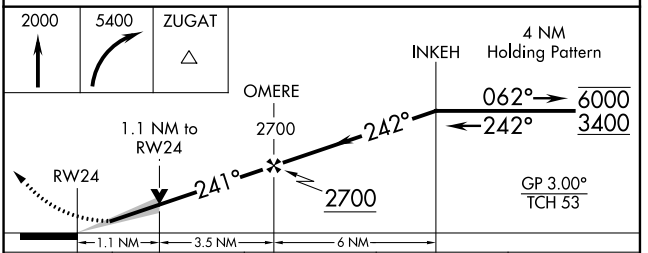

CATEGORY	A	B	C	D
LPV DA	1390-½ 200 (200-½)			
LNAV/VNAV DA	1467-½ 277 (300-½)			
LNAV MDA	1580-½ 390 (400-½)		1580-⅝ 390 (400-⅝)	
CIRCLING	1640-1 450 (500-1)	1660-1 470 (500-1)	2020-2½ 830 (900-2½)	2040-2¾ 850 (900-2¾)

ELEV 1190 D TDZE 1190



HIRL Rwy 6-24 L
REIL Rwy 6

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026