WAAS CH 40433 W23A	APP CRS 234°	Rwy Ldg 3601 TDZE 3204 Apt Elev 3204


RNAV (GPS) RWY 23


RAPID CITY RGNL (RAP)


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA when using Ellsworth AFB altimeter setting.

MISSED APPROACH: Climbing left turn to 5300 direct EWEBU and hold.


ASOS	ELLSWORTH APP CON ★	RAPID CITY TOWER ★	GND CON	UNICOM
118.525	119.5 259.1	125.85 (CTAF) L 257.8	121.9	122.95



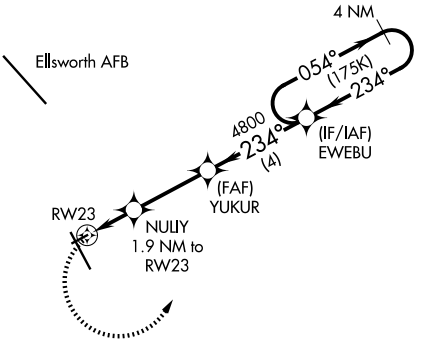

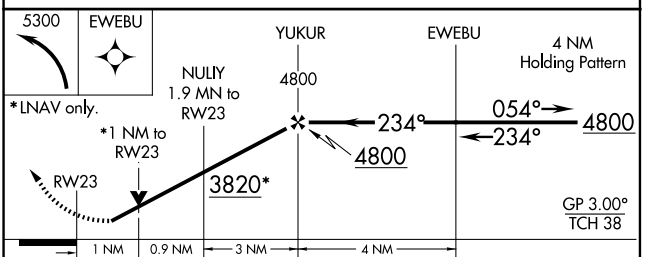

CATEGORY	A	B	C	D
LPV DA	3454-1	250 (300-1)	NA	
LNAV/VNAV DA	3454-1	250 (300-1)	NA	
LNAV MDA	3560-1	356 (400-1)	NA	
CIRCLING	3660-1 456 (500-1)	3840-1 636 (700-1)	NA	

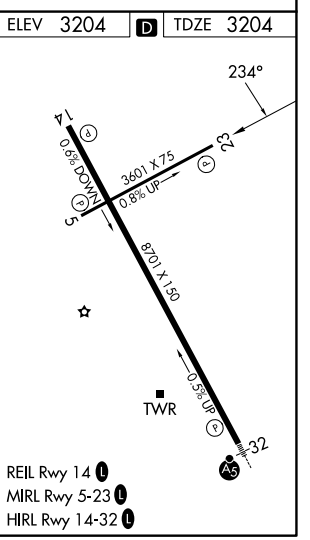

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026