| LOC I-MSS | APP CRS | Rwy Ldg / TDZE / Apt Elev |
|---|---|---|
| 108.7 | 045° | 5601 / 205 / 221 |

# ILS or LOC RWY 5

## MASSENA INTL-RICHARDS FLD (MSS)

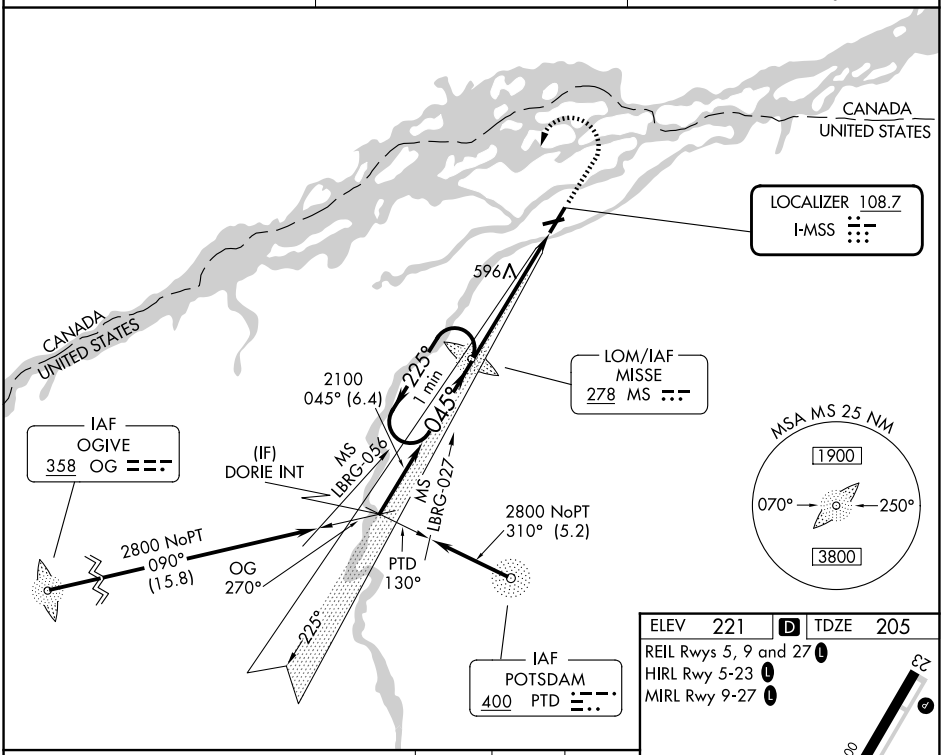
ADF required. ADF and RADAR required for procedure entry.

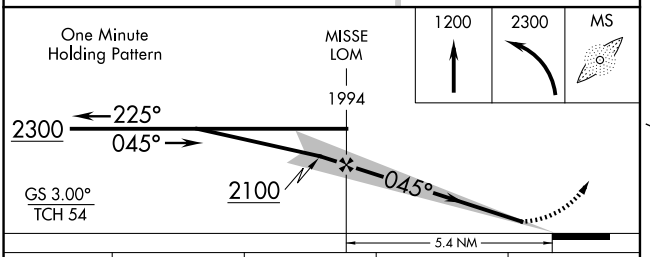
Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use PTD altimeter setting: increase S-ILS 5 DA to 528 feet and all visibilities ¼ SM; increase all MDAs 80 feet and S-LOC 5 visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM.

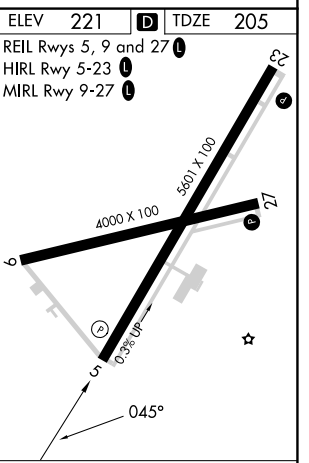
NA

MISSED APPROACH: Climb to 1200 then climbing left turn to 2300 direct MISSE LOM and hold.

| ASOS | BOSTON CENTER | UNICOM |
|---|---|---|
| 128.075 | 135.25 377.1 | 123.0 (CTAF) L |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 5 | 455-¾ 250 (300-¾) | | | |
| S-LOC 5 | 800-1 595 (600-1) | | 800-1¾ 595 (600-1¾) | |
| CIRCLING | 800-1 579 (600-1) | | 880-1¾ 659 (700-1¾) | 900-2¼ 679 (700-2¼) |

FAF to MAP 5.4 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:24 | 3:36 | 2:42 | 2:10 | 1:48 |



NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026