RNAV (GPS) RWY 22

DELAWARE COASTAL (GED)


WAAS	APP CRS	Rwy Ldg	5331
CH 60921	225°	TDZE	51
W22A		Apt Elev	53

RNP APCH.


T A Rwy 22 helicopter visibility reduction below ¾ NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct ZARVI and hold.

ASOS	DOVER APP CON	GCO	UNICOM
118.375	132.425 257.875	125.55	123.0 (CTAF) L

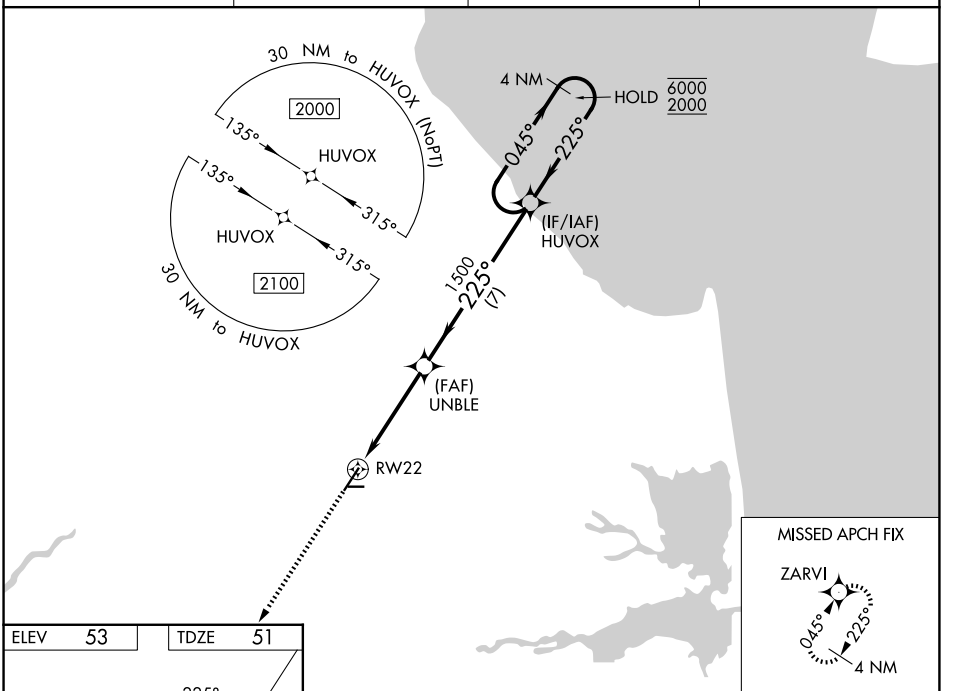

ELEV 53 TDZE 51

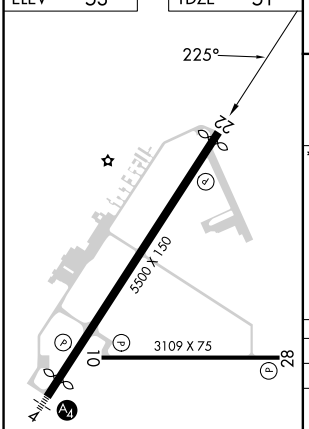


REIL Rwys 4, 22, 10 and 28 L
MIRL Rwys 4-22 and 10-28 L

2000 ZARVI

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

4 NM Holding Pattern

*LNAV only.

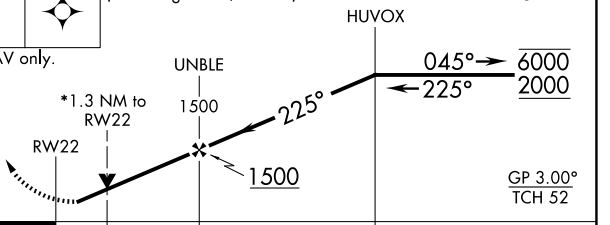

CATEGORY	A	B	C	D
LPV DA	321-⅞		270 (300-⅞)	
LNAV/VNAV DA	446-1⅛		395 (400-1⅛)	
LNAV MDA	500-1	449 (500-1)	500-1⅜	449 (500-1⅜)
CIRCLING	560-1 507 (600-1)	580-1 527 (600-1)	720-1¾ 667 (700-1¾)	720-2 667 (700-2)

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026