APP CRS	Rwy Ldg	10200
258°	TDZE	926
	Apt Elev	944

RNAV (RNP) Z RWY 26L

ONTARIO INTL (ONT)


RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.10 visibility all Cats to RVR 4500, RNP 0.17 visibility all Cats to RVR 5000, RNP 0.30 visibility all Cats to RVR 6000.


ALSF-2

MISSED APPROACH: Climb to 3400 on track 258° to AXOYO and track 174° to LAKVE and track 122° to MRIAM and track 079° to ADRYN and hold.

D-ATIS	SOCAL APP CON	ONTARIO TOWER	GND CON
124.25	127.0 318.2	120.6 360.775	121.9 257.8

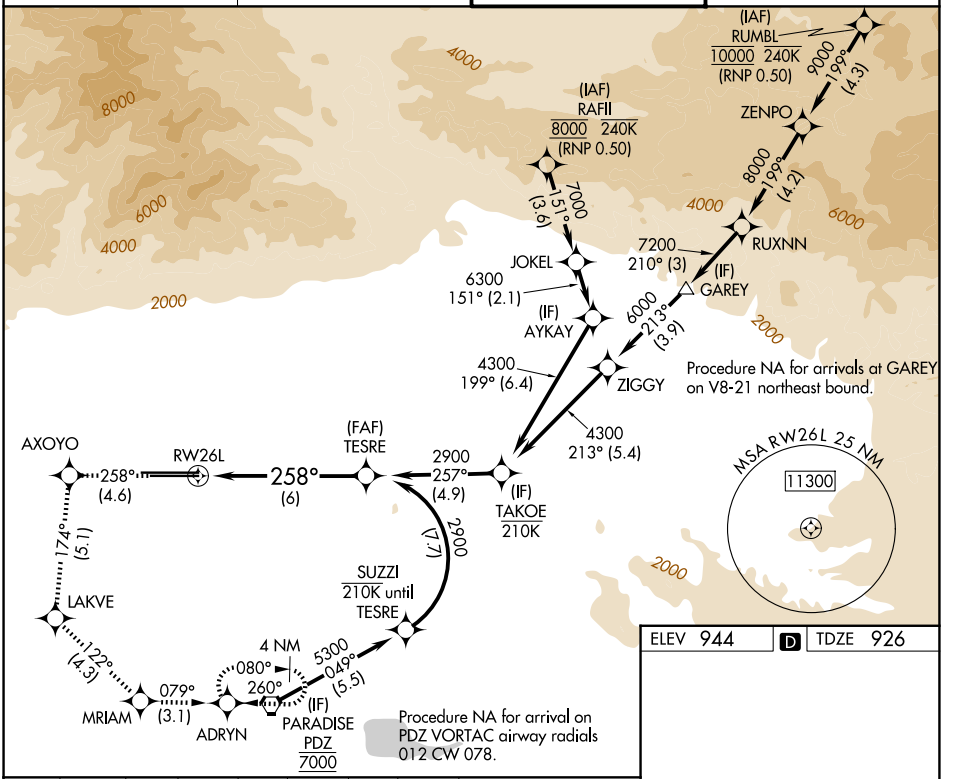


3400 ↑ tr 258°	AXOYO	tr 174°	LAKVE	tr 122°	MRIAM	tr 079°	ADRYN	TESRE 2900

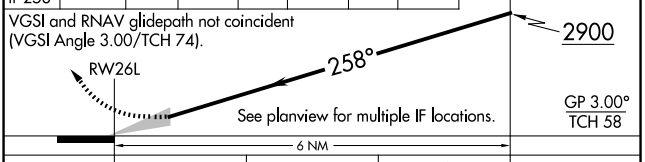

CATEGORY	A	B	C	D
RNP 0.10 DA	1203/24		277 (300-½)	
RNP 0.17 DA	1245/24		319 (400-½)	
RNP 0.30 DA	1322/35		396 (400-⅝)	

AUTHORIZATION REQUIRED

ELEV 944 D TDZE 926



TDZL/RCLS Rwys 8L, 26L and 26R
HIRL Rwys 8L-26R and 8R-26L

SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026