VOR/DME ENA	APP CRS	Rwy Ldg	7575
117.6	192°	TDZE	98
Chan 123		Apt Elev	100

VOR RWY 20R

KENAI MUNI (ENA) (PAEN)


T Circling Rwy 2R, 20L NA at night. DME required. VDP NA when using Soldotna altimeter setting. When local altimeter setting not received, use Soldotna altimeter setting and increase all MDA 40 feet, increase S-20R Cats C and D visibility to RVR 5000. Circling Rwy 2W, 20W NA.


A

MALSR


MISSED APPROACH: Climb to 2200 on ENA VOR/DME R-192 to DIXIT/ENA VOR/DME 10 DME and hold.

ATIS	ANCHORAGE CENTER	KENAI TOWER★	GND CON	KENAI RADIO
133.35	125.7 379.1	121.3 (CTAF) L 239.3	118.75	122.65 L

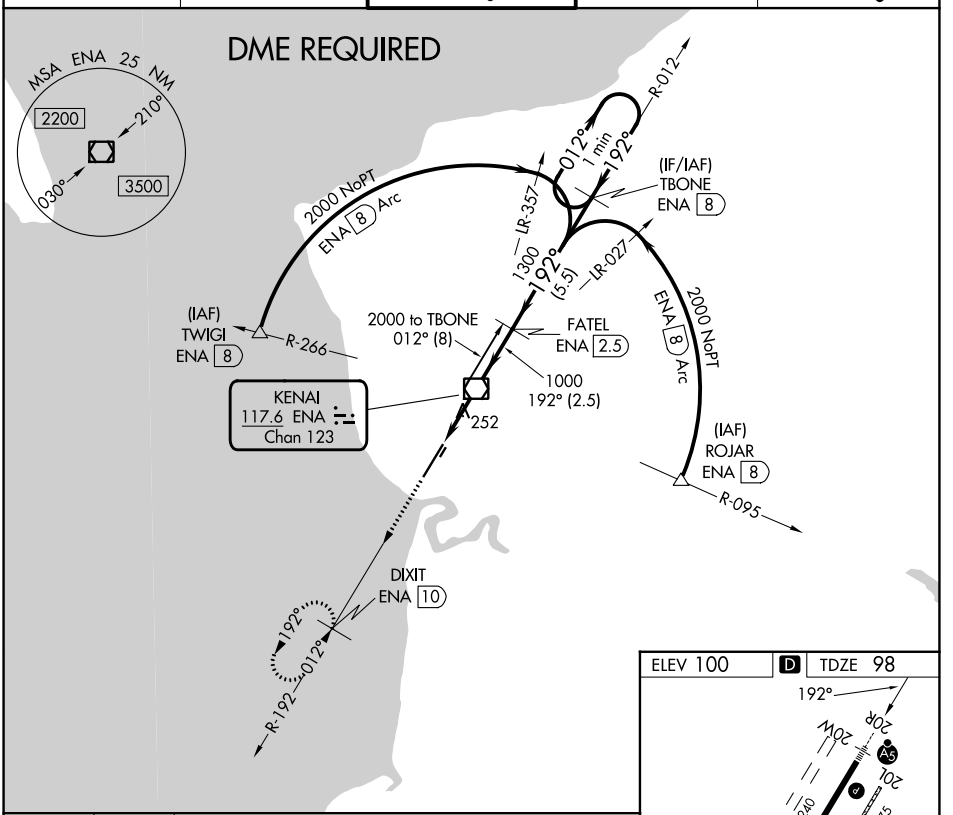

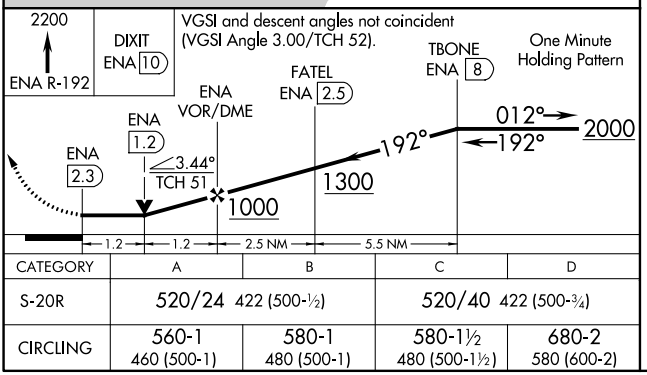

CATEGORY	A	B	C	D
S-20R	520/24 422 (500-½)		520/40 422 (500-¾)	
CIRCLING	560-1 460 (500-1)	580-1 480 (500-1)	580-1½ 480 (500-1½)	680-2 580 (600-2)

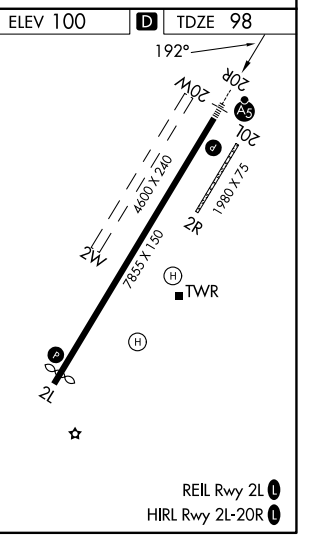

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026