LOC/DME I-EKI	APP CRS	Rwy Ldg	7510
110.3	312°	TDZE	43
Chan 40		Apt Elev	46

LOC RWY 31
CORPUS CHRISTI INTL (CRP)

DME or RADAR required.
RADAR required for procedure entry at ZULEX.

For inop ALS, increase S-LOC 31 Cats C, D, and E visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 on heading 335° and CRP VORTAC R-287 to ATHIS INT/CRP VORTAC 23.3 DME and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON
126.8	120.9 348.725	119.4 257.8	121.9 269.15

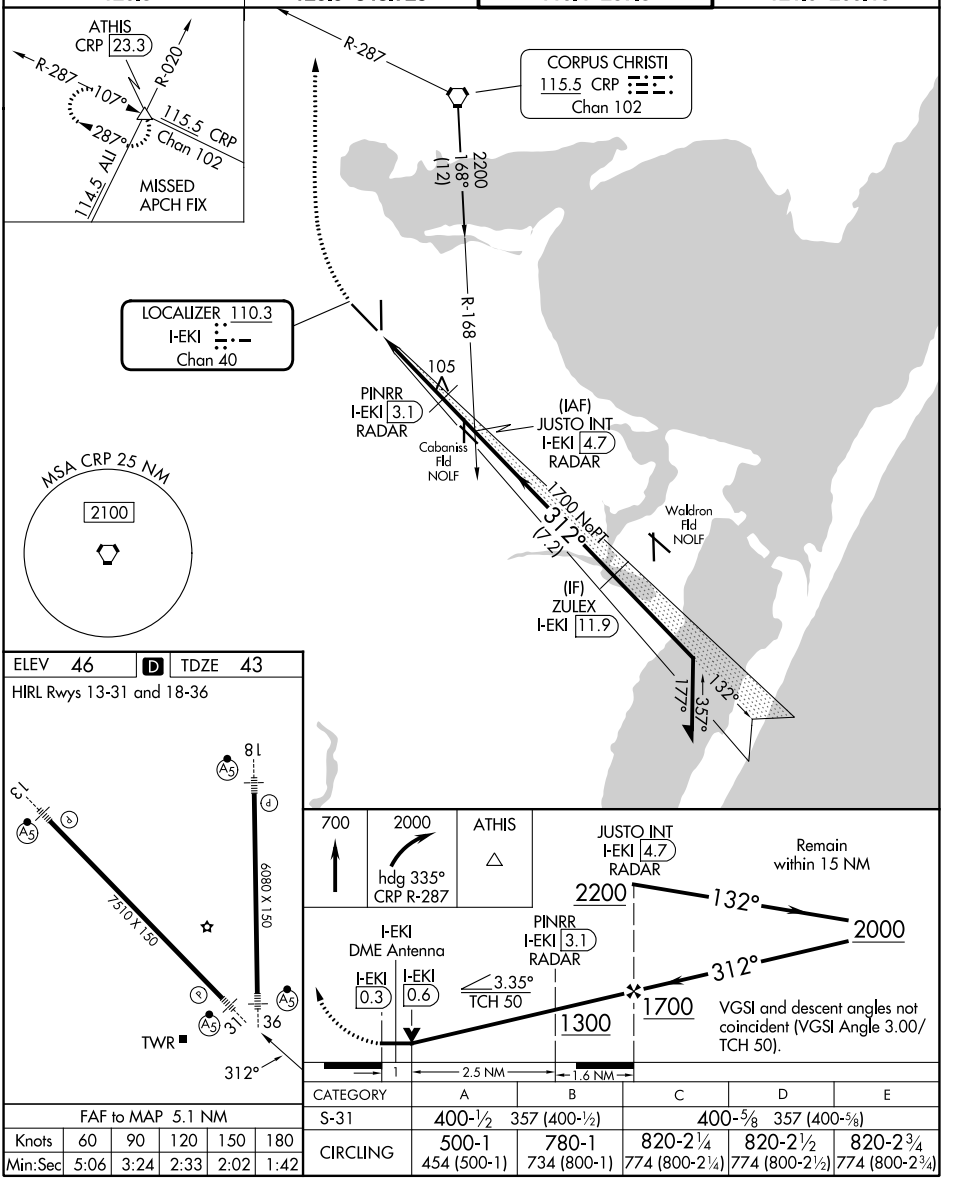

ELEV 46	D	TDZE 43

HIRL Rwys 13-31 and 18-36

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

CATEGORY	A	B	C	D	E
S-31	400-½ 357 (400-½)		400-⅝ 357 (400-⅝)		
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026