RNAV (GPS) RWY 2

DAYTON/WRIGHT BROTHERS (MGY)


WAAS CH 45801 W02A	APP CRS 026°	Rwy Ldg 4700 TDZE 949 Apt Elev 957


RNP APCH - GPS.


T Baro-VNAV and VDP NA when using DAY altimeter setting. For uncompensated A Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use DAY altimeter setting and increase LPV DA to 1262 feet; increase LNAV/VNAV DA to 1347 feet and all visibilities ⅛ SM; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3100 direct WOBUL and hold.

ASOS	COLUMBUS APP CON	CLNC DEL	UNICOM
118.375	118.85 269.275	119.4	122.8 (CTAF) L

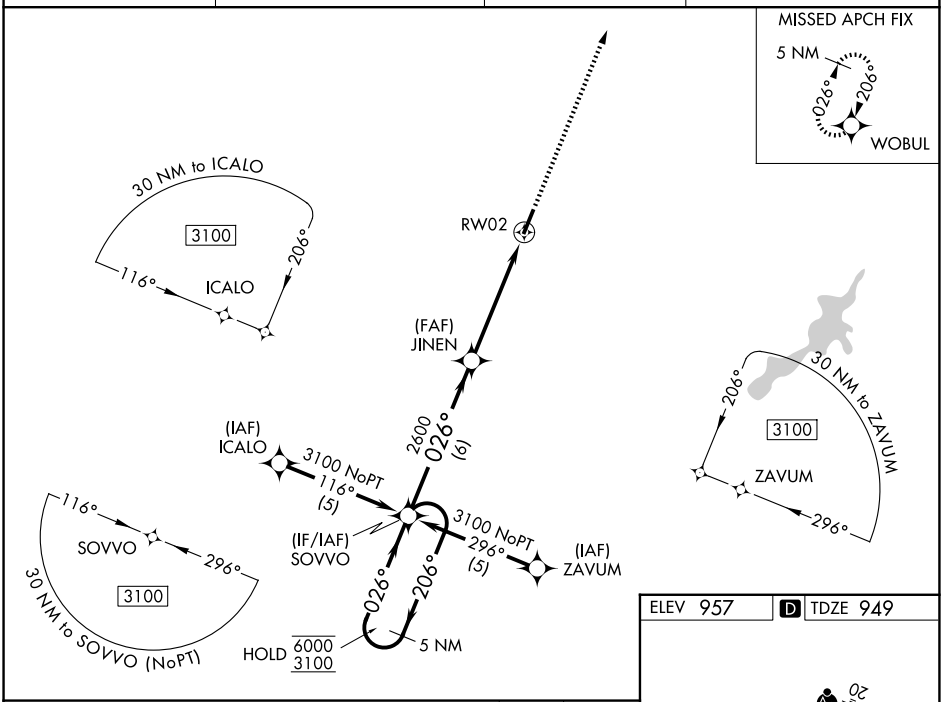

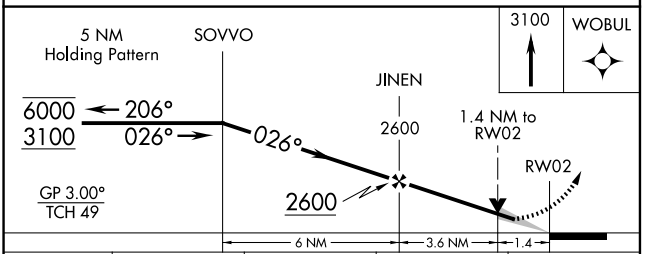

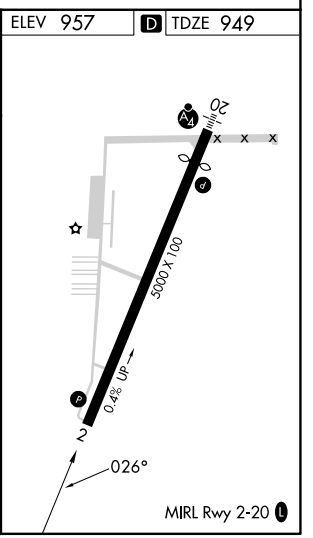

CATEGORY	A	B	C	D
LPV DA	1214-⅞ 265 (300-⅞)			
LNAV/VNAV DA	1299-1 350 (400-1)			
LNAV MDA	1420-1 471 (500-1)		1420-1⅜ 471 (500-1⅜)	
CIRCLING	1480-1 523 (600-1)	1520-1 563 (600-1)	1660-2 703 (800-2)	1660-2¼ 703 (800-2¼)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026