
LOC I-PTK	APP CRS	Rwy Ldg	6520
111.1	275°	TDZE	974
		Apt Elev	981

LOC BC RWY 27L
OAKLAND COUNTY INTL (PTK)


Circling Rwy 9L, 36 NA at night. When local altimeter setting not received, use DET altimeter setting and increase all MDAs 120 feet, increase S-LOC BC 27L visibility Cats C and D ⅜ SM, and Circling visibility Cats C and D ½ SM.

MISSED APPROACH: Climbing left turn to 3000 direct SVM VORTAC and hold.

ATIS	DETROIT APP CON	PONTIAC TOWER ★	GND CON	UNICOM
125.025	132.35 284.0	120.5 (CTAF) L	121.9	122.95

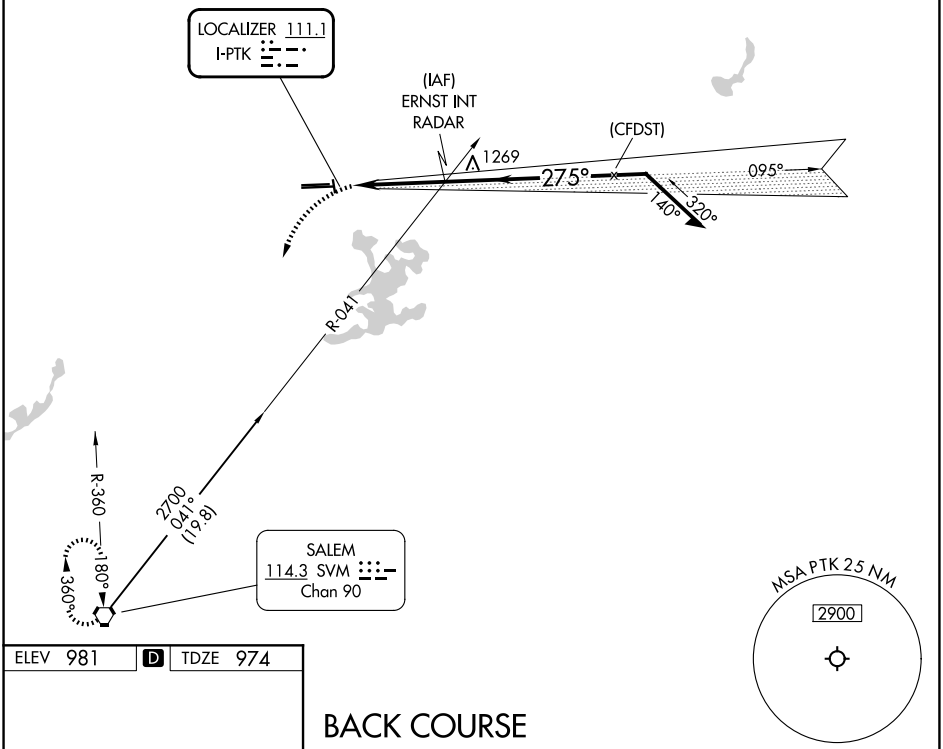

ELEV 981 D TDZE 974



HIRL Rwy 9R-27L L
MIRL Rwy 9L-27R
REIL Rwy 27L L
REIL Rwys 9L and 27R


FAF to MAP 3.3 NM

Knots	60	90	120	150	180
Min:Sec	3:18	2:12	1:39	1:19	1:06

BACK COURSE

3000 SVM

Disregard GS indications.

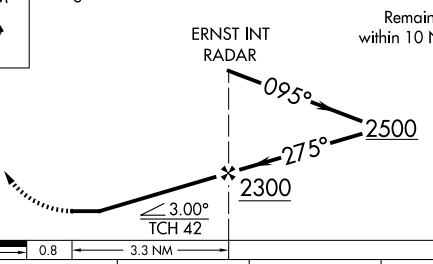

CATEGORY	A	B	C	D
S-LOC 27L	1440-1 466 (500-1)		1440-1⅜ 466 (500-1⅜)	
CIRCLING	1500-1 519 (600-1)	1540-1 559 (600-1)	1640-1¾ 659 (700-1¾)	1640-2 659 (700-2)

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026