RNAV (GPS) RWY 13R

PORTLAND-HILLSBORO (HIO)

WAAS CH 69502 W13A	APP CRS 127°	Rwy Ldg 6600 TDZE 203 Apt Elev 208


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling Rwy 13L, 31R NA at night. For inop ALS, increase LNAV Cat C/D visibility to 1⅜ SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct UBG VOR/DME and hold. Continue climb-in-hold to 3000.

ATIS	PORTLAND APP CON	HILLSBORO TOWER *	GND CON	UNICOM
127.65	126.0 269.175	119.3 (CTAF) L 239.3	121.7	122.95

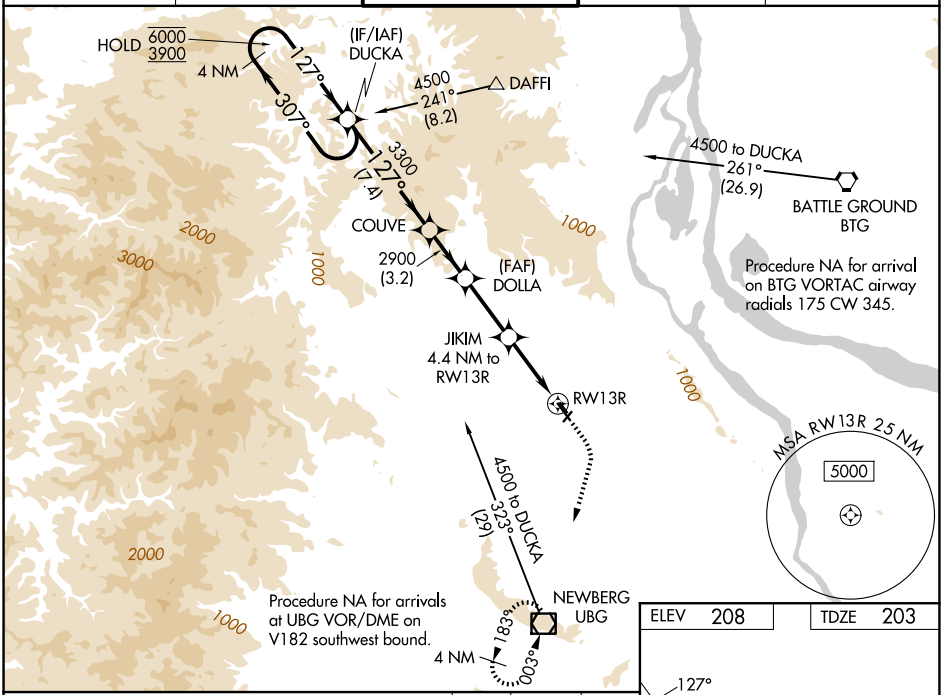

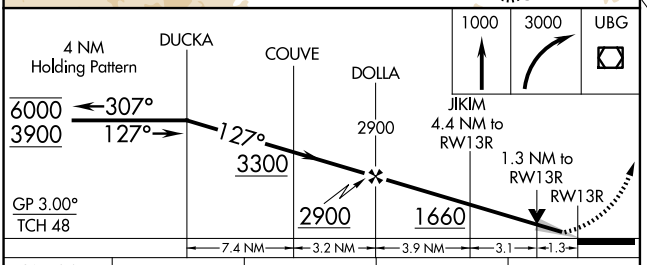

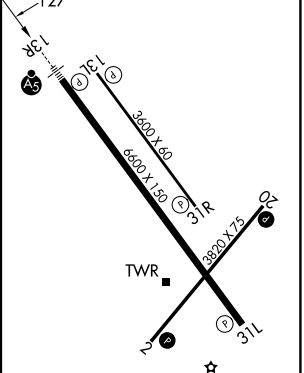

CATEGORY	A	B	C	D
LPV DA *	403/24 200 (200-½)			
LNAV/VNAV DA	661/45 458 (500-⅞)			
LNAV MDA	680/24 477 (500-½)		680/50 477 (500-1)	
CIRCLING	680-1 472 (500-1)	720-1 512 (600-1)	940-2 732 (800-2)	980-2½ 772 (800-2½)

REIL Rwy 31L
HIRL Rwy 13R-31L
MIRL Rwys 2-20 and 13L-31R

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026