RNAV (GPS) RWY 33

HARRISON COUNTY (ASL)


WAAS	APP CRS	Rwy Ldg	5002
CH 86926	334°	TDZE	349
W33A		Apt Elev	357

RNP APCH.

T A NA Baro-VNAV NA when using Longview altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 40°C (104°F). Rwy 33 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Longview altimeter setting and increase all DA 52 feet and all MDA 60 feet; increase LPV all Cats visibility ⅛ mile, LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct GAWDO and hold.

AWOS-3PT	SHREVEPORT APP CON	UNICOM
118.675	119.9 335.55	122.8 (CTAF) L

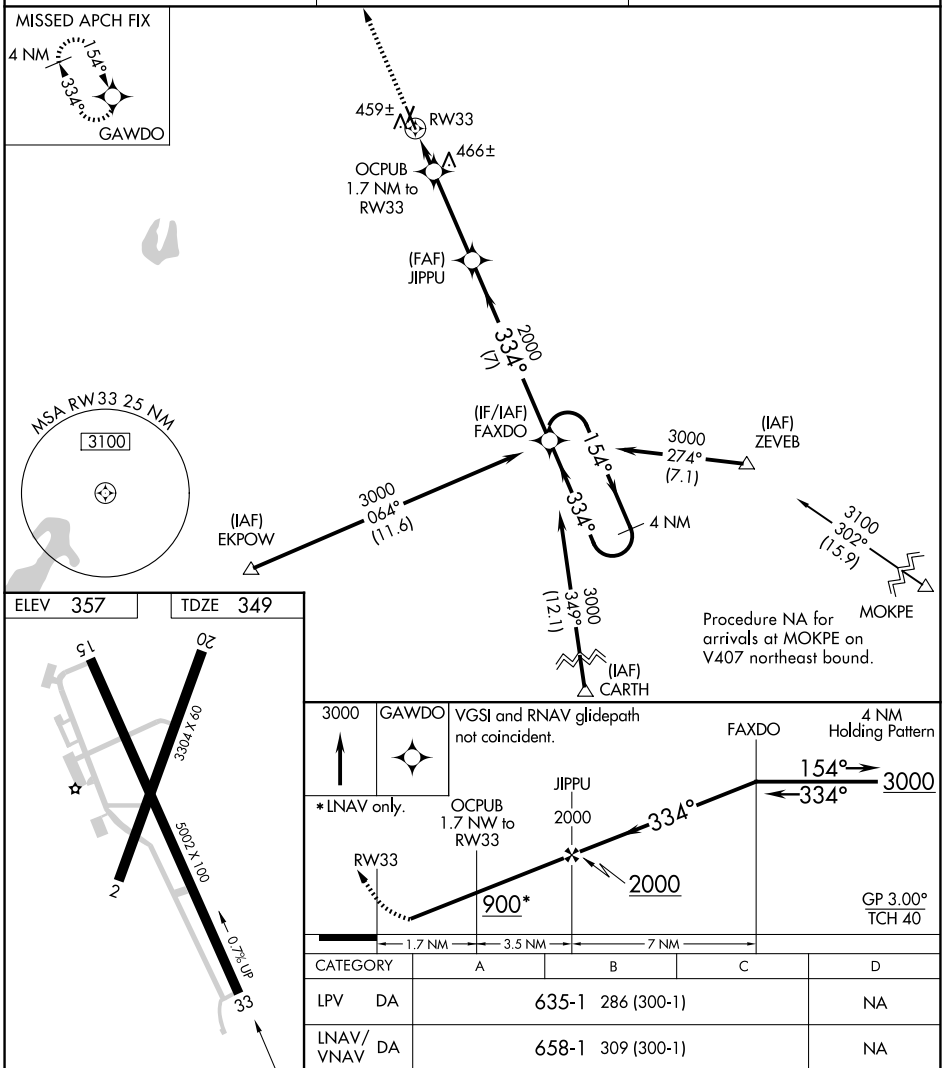

CATEGORY	A	B	C	D
LPV DA	635-1 286 (300-1)			NA
LNAV/VNAV DA	658-1 309 (300-1)			NA
LNAV MDA	720-1 371 (400-1)		720-1⅛ 371 (400-1⅛)	NA

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026