LOC I-ARR	APP CRS	Rwy Ldg	6501
108.9	090°	TDZE	707
		Apt Elev	712

ILS or LOC RWY 9


AURORA MUNI (ARR)


RADAR required for procedure entry.


MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 090° and on DPA VOR/DME R-185 to VAINS INT/DPA 7.9 DME and hold, continue climb-in-hold to 3000.

ATIS	CHICAGO APP CON	AURORA TOWER★	GND CON
125.85	133.5 349.0	120.6 (CTAF) L	121.7

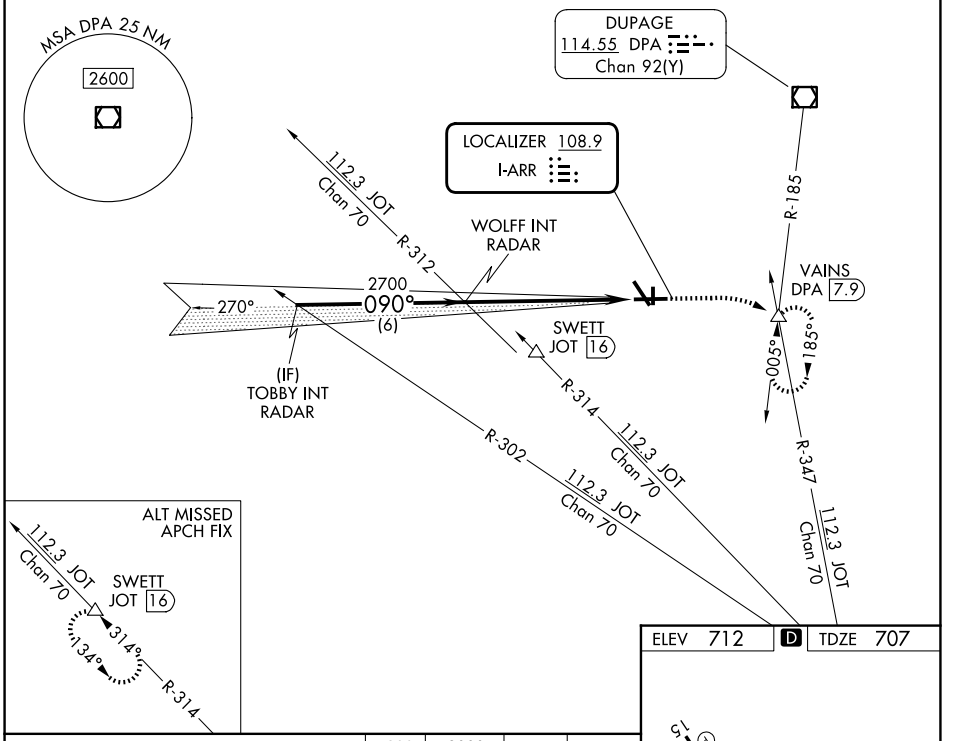

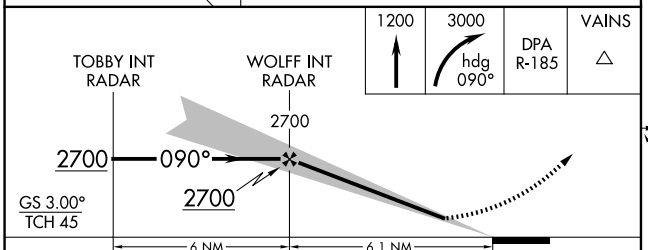

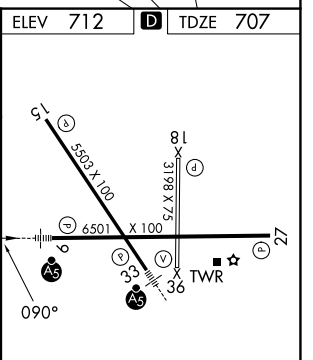

CATEGORY	A	B	C	D
S-ILS 9	907-½ 200 (200-½)			
S-LOC 9	1240-½ 533 (600-½)		1240-1 533 (600-1)	
CIRCLING	1240-1 528 (600-1)		1300-1½ 588 (600-1½)	1340-2 628 (700-2)

MIRL Rwy 18-36 L
HIRL Rwys 15-33 and 9-27 L
REIL Rwys 15, 18, 27, and 36 L

FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026