RNAV (GPS) RWY 23


NORTH CENTRAL STATE (SFZ)


WAAS	APP CRS	Rwy Ldg	5000
CH 86431	227°	TDZE	429
W23A		Apt Elev	441

Circling Rwy 15, 33 NA at night. Baro-VNAV NA when using Providence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Providence altimeter setting. When local altimeter setting not received, use Providence altimeter setting and increase all DA 82 feet and all MDA 100 feet; increase LPV all Cats visibility to 1⅛, LNAV/VNAV all Cats visibility to 1¾ and LNAV Cat C visibility to 1⅜. Rwy 23 helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2600 direct WALLU and hold.

AWOS-3PT	PROVIDENCE APP CON ★	CLNC DEL	UNICOM
120.775	123.675 244.875	124.35	123.075 (CTAF) L

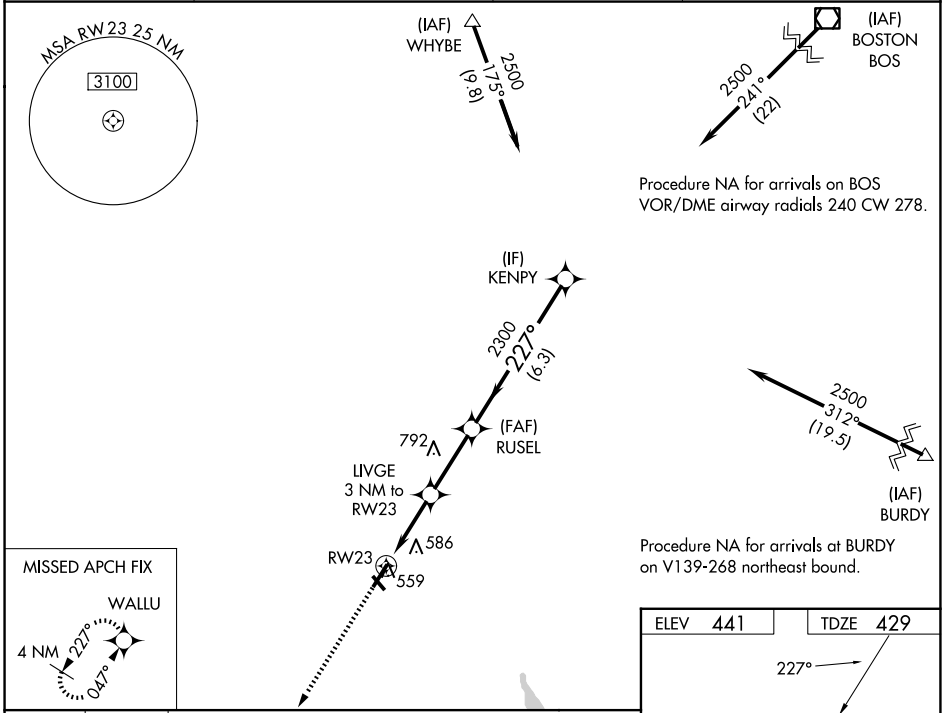

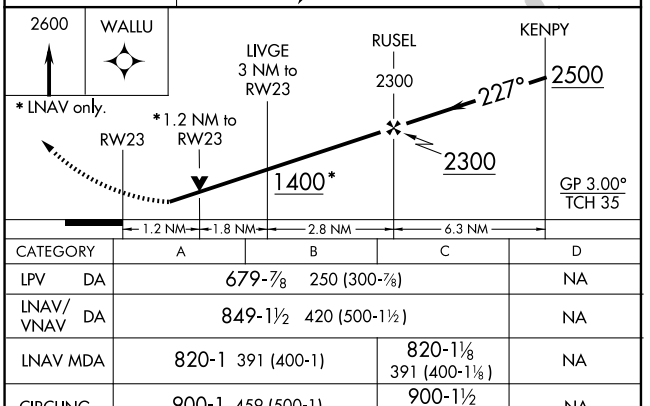

CATEGORY	A	B	C	D
LPV DA	679-⅞ 250 (300-⅞)			NA
LNAV/VNAV DA	849-1½ 420 (500-1½)			NA
LNAV MDA	820-1 391 (400-1)		820-1⅛ 391 (400-1⅛)	NA
CIRCLING	900-1 459 (500-1)		900-1½ 459 (500-1½)	NA

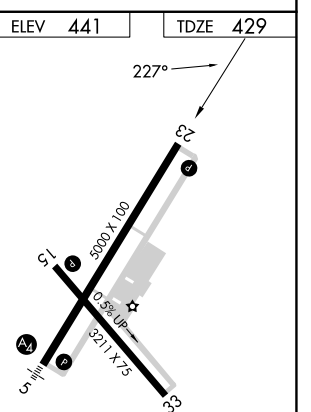

HIRL Rwy 5-23 L
MIRL Rwy 15-33 L
REIL Rwys 15, 23 and 33 L

NE-1, 29 OCT 2026 to 26 NOV 2026
NE-1, 29 OCT 2026 to 26 NOV 2026