# RNAV (GPS) RWY 28


HERITAGE FLD (PTW)

| WAAS CH 40235 W28A | APP CRS 276° | Rwy Ldg 3181 / TDZE 308 / Apt Elev 308 |
|---|---|---|


Circling NA south of Rwy 10-28. DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Wings Fld altimeter setting. When local altimeter setting not received, use Wings Fld altimeter setting and increase all DA 35 feet and all MDA 40 feet, increase LPV all Cats visibilities 1/8 mile. Helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 2600 direct EZABO and hold.


| ASOS | PHILADELPHIA APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 119.425 | 126.85 263.125 | 118.55 | 122.7 (CTAF) L |

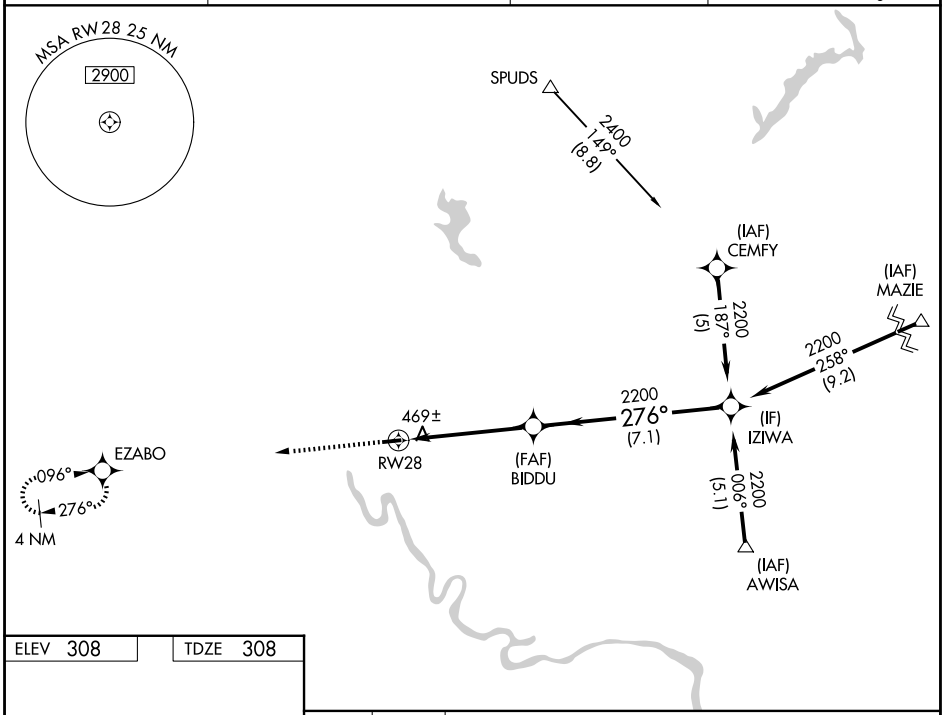


| ELEV 308 | TDZE 308 |
|---|---|




MIRL Rwy 10-28 L
REIL Rwys 10 and 28

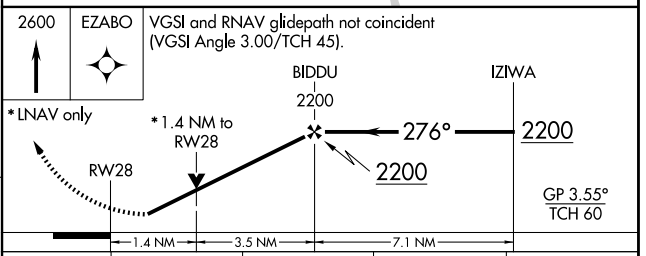


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 652-1 | 344 (400-1) | NA | |
| LNAV/VNAV DA | 779-1 3/8 | 471 (500-1 3/8) | NA | |
| LNAV MDA | 820-1 | 512 (600-1) | NA | |
| CIRCLING | 940-1 | 632 (700-1) | NA | |



NE-4, 29 OCT 2026 to 26 NOV 2026
NE-4, 29 OCT 2026 to 26 NOV 2026