RNAV (GPS) RWY 5

WAUKEGAN NTL (UGN)


WAAS	APP CRS	Rwy Ldg	6001
CH 81812	051°	TDZE	726
W05A		Apt Elev	728

RNP APCH - GPS.


Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 14, 32 NA at night.


MISSED APPROACH: Climb to 2300 direct LIRIC and hold.

ATIS	CHICAGO APP CON	WAUKEGAN TOWER ★	GND CON
132.4	120.55	120.05 (CTAF) L 273.55	121.65

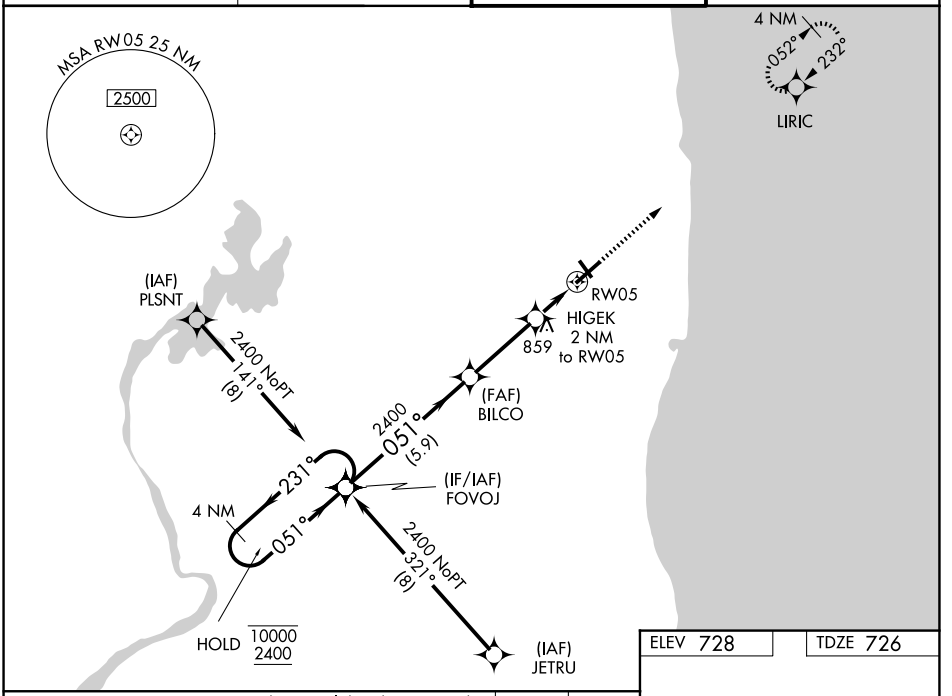

ELEV 728 TDZE 726

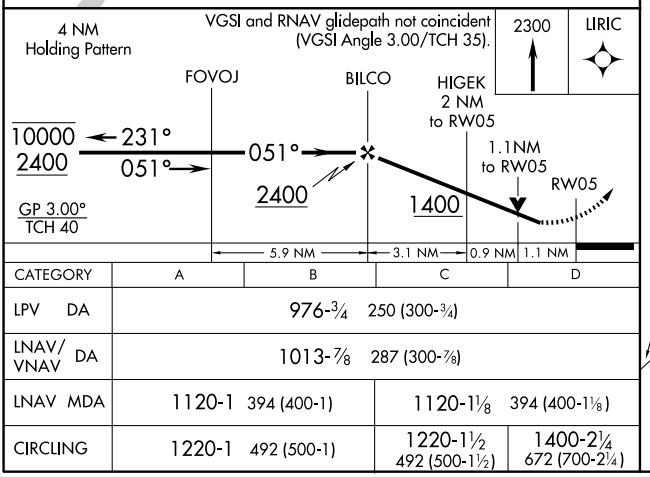



CATEGORY	A	B	C	D
LPV DA	976-¾ 250 (300-¾)			
LNAV/VNAV DA	1013-⅞ 287 (300-⅞)			
LNAV MDA	1120-1 394 (400-1)		1120-1⅛ 394 (400-1⅛)	
CIRCLING	1220-1 492 (500-1)		1220-1½ 492 (500-1½)	1400-2¼ 672 (700-2¼)

REIL Rwy 5 L
HIRL Rwy 5-23 L
MIRL Rwy 14-32 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026