RNAV (GPS) RWY 17

ORMOND BEACH MUNI (OMN)


WAAS CH 40234 W17A	APP CRS 175°	Rwy Ldg 3704 TDZE 27 Apt Elev 28


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using DAB altimeter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use DAB altimeter setting: increase LPV DA to 321 feet; increase LNAV/VNAV DA to 316 feet; increase all MDAs 20 feet.

MISSED APPROACH: Climb to 600 then climbing right turn to 2800 direct FLYHI and hold, continue climb-in-hold to 2800.


ATIS	DAYTONA APP CON	ORMOND BEACH TOWER★	GND CON	UNICOM
118.475	125.8 269.075	119.075 (CTAF) L	121.625	123.05

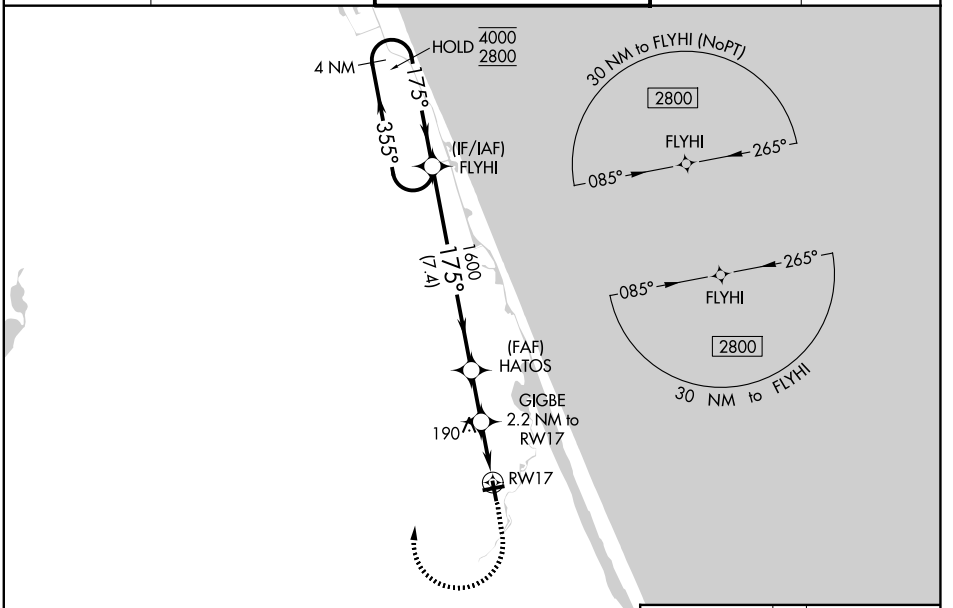

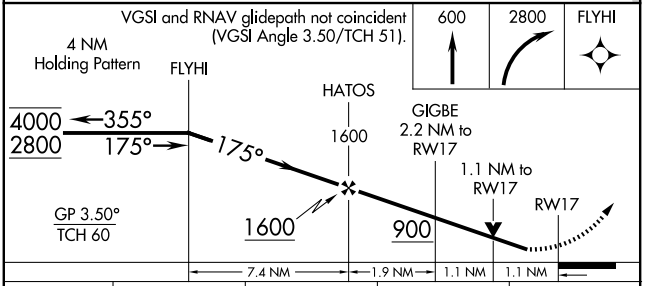

CATEGORY	A	B	C	D
LPV DA	302-⅞	275 (300-⅞)		NA
LNAV/VNAV DA	297-⅞	270 (300-⅞)		NA
LNAV MDA	500-1	473 (500-1)	500-1⅜ 473 (500-1⅜)	NA
CIRCLING	500-1	472 (500-1)	740-2 712 (800-2)	NA

ELEV 28 TDZE 27



REIL Rwys 9, 17, 27, and 35 L
MIRL Rwys 9-27 and 17-35 L

SE-3, 29 OCT 2026 to 26 NOV 2026