WAAS	APP CRS	Rwy Ldg	5041
CH 62824	282°	TDZE	969
W28A		Apt Elev	974

RNAV (GPS) RWY 28

POLK COUNTY/CORNELIUS MOORE FLD (4A4)

RNP APCH.

NA

Baro-VNAV and VDP NA when using Cartersville altimeter setting. Rwy 28 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Obtain local altimeter setting on CTAF, when not received, use Cartersville altimeter setting: increase LPV DA to 1287 feet; increase LNAV/VNAV DA to 1353 feet and all visibility 1/8 SM; increase all MDAs 80 feet and visibility Cats C and D 1/8 SM.

MISSED APPROACH: Climb to 1500 then climbing left turn to 3100 direct GUSSY and hold.

ATLANTA CENTER	UNICOM
124.5 270.325	122.8 (CTAF) L

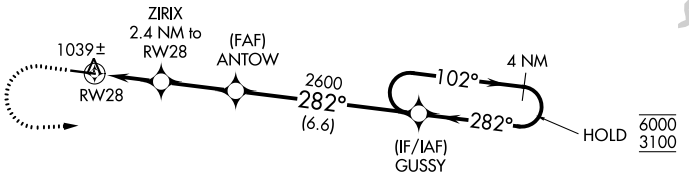



ELEV 974 TDZE 969



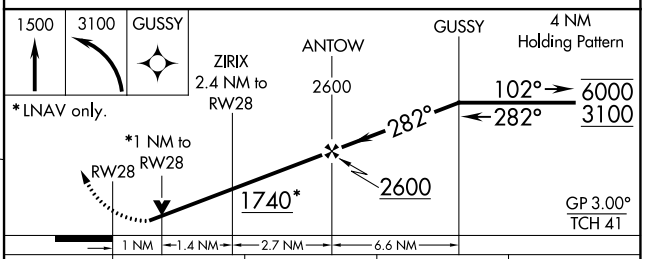

CATEGORY	A	B	C	D
LPV DA		1219-1	250 (300-1)	
LNAV/VNAV DA		1285-1	316 (400-1)	
LNAV MDA		1300-1	331 (400-1)	

MIRL Rwy 10-28 L

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026