ZAAPA SEVEN DEPARTURE (RNAV)

(ZAAPA7.ZAAPA) 29OCT26

LORAIN COUNTY RGNL (LPR)

LORAIN/ELYRIA, OHIO


CLEVELAND DEP CON
125.35 346.325
ASOS
118.925
CLNC DEL
125.7
CTAF
122.7


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.


TOP ALTITUDE: ASSIGNED BY ATC

TAKEOFF MINIMUMS:
Rwys 7, 25: Standard with minimum climb of 500'/NM to 1300.

NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

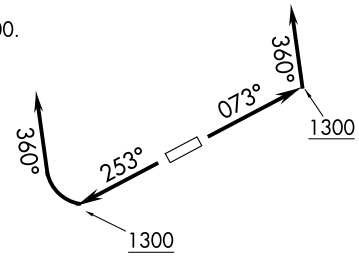



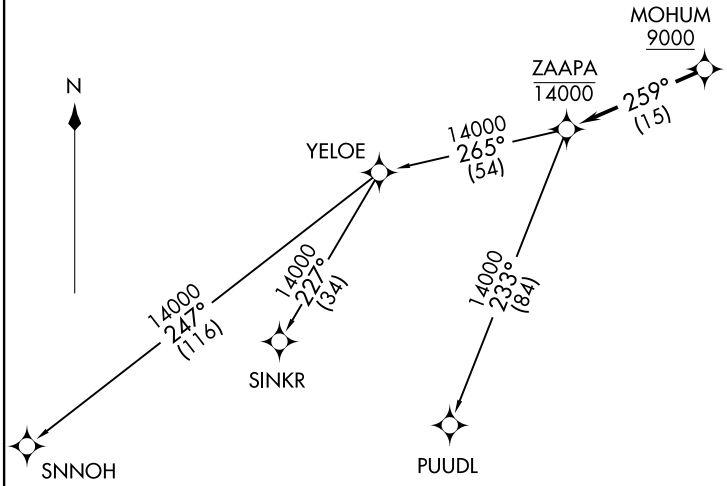

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 7: Climb on heading 073° to 1300, then on heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....
TAKEOFF RUNWAY 25: Climb on heading 253° to 1300, then right turn heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUUDL TRANSITION (ZAAPA7.PUUDL)
SINKR TRANSITION (ZAAPA7.SINKR)
SNNOH TRANSITION (ZAAPA7.SNNOH)

(ZAAPA7.ZAAPA) 26302

ZAAPA SEVEN DEPARTURE (RNAV)

AL-5703 (FAA)

LORAIN COUNTY RGNL (LPR)

LORAIN/ELYRIA, OHIO