RNAV (GPS) RWY 22


DEXTER B FLORENCE MEML FLD (ADF)


WAAS	APP CRS	Rwy Ldg	5002
CH 93835	220°	TDZE	182
W22A		Apt Elev	182

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hot Springs altimeter setting and increase all MDAs 120 feet, and increase LP and LNAV Cat C visibility ⅜ SM and Circling Cat C visibility ½ mile. Night landing: Rwy 22 NA. Helicopter visibility reduction below 1 SM NA.


MISSED APPROACH: Climb to 2000 direct CUBUG and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
118.175	128.475 377.15	122.7 (CTAF) L

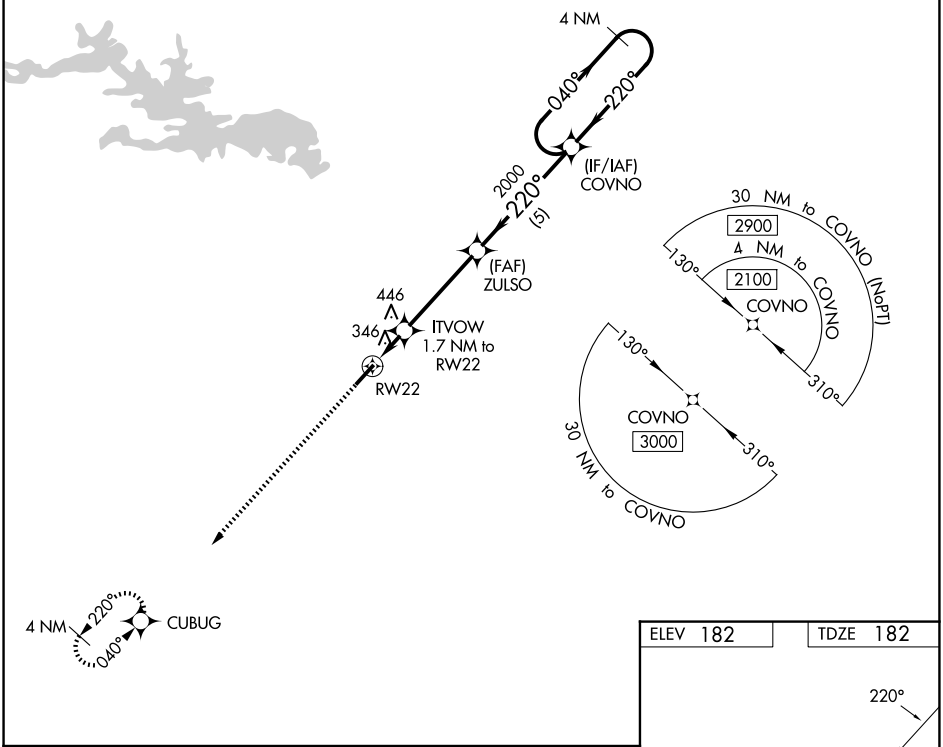

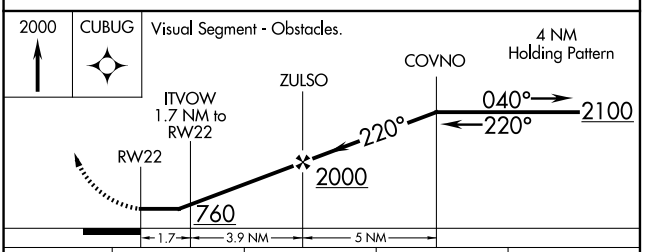

CATEGORY	A	B	C	D
LP MDA	600-1 418 (500-1)		600-1⅜ 418 (500-1⅜)	NA
LNAV MDA	680-1 498 (500-1)		680-1⅜ 498 (500-1⅜)	NA
CIRCLING	760-1 578 (600-1)	800-1 618 (700-1)	1040-2½ 858 (900-2½)	NA

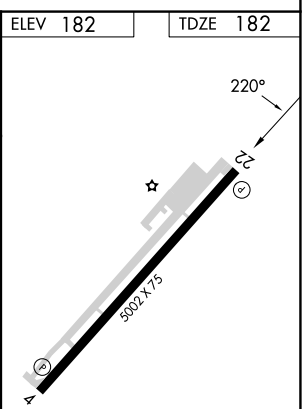

MIRL Rwy 4-22 L
REIL Rwys 4 and 22 L

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026