| WAAS | APP CRS | Rwy Idg | 4001 |
|---|---|---|---|
| CH 81919 | 332° | TDZE | 730 |
| W33A | | Apt Elev | 730 |


# RNAV (GPS) RWY 33


## MOUNT PLEASANT MUNI (MPZ)

Baro-VNAV NA when using Burlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When VGSI inoperative, straight-in minimums NA at night. When local altimeter setting not received, use Burlington altimeter setting: increase LPV DA to 1031 feet, LNAV/VNAV DA to 1073 feet and all LNAV/VNAV visibilities ¼ mile; increase all MDA 60 feet, and LNAV and Circling Cat C visibility ¼ mile. Circling NA to Rwy 3/21.


MISSED APPROACH: Climb to 3500 direct SEHVI and hold.

| AWOS-3 | CHICAGO CENTER | UNICOM |
|---|---|---|
| 119.325 | 135.6 316.1 | 123.05 (CTAF) L |

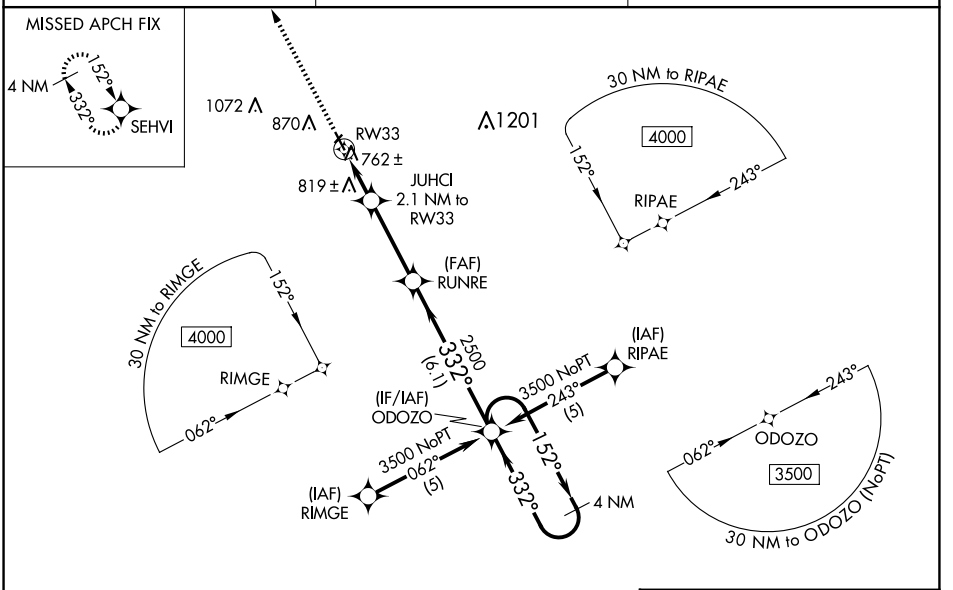

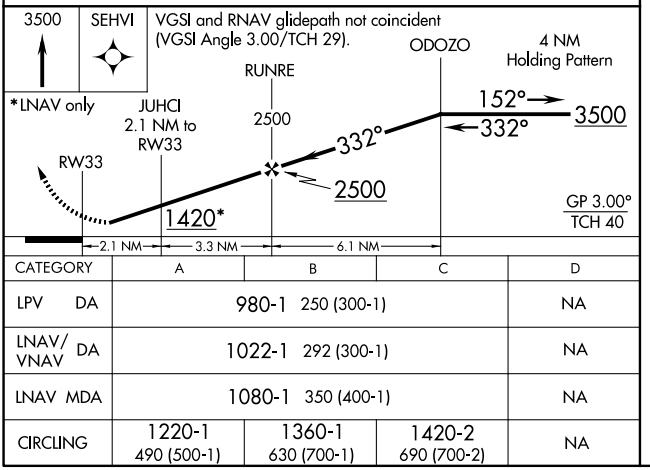
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 980-1 250 (300-1) | | | NA |
| LNAV/VNAV DA | 1022-1 292 (300-1) | | | NA |
| LNAV MDA | 1080-1 350 (400-1) | | | NA |
| CIRCLING | 1220-1 490 (500-1) | 1360-1 630 (700-1) | 1420-2 690 (700-2) | NA |



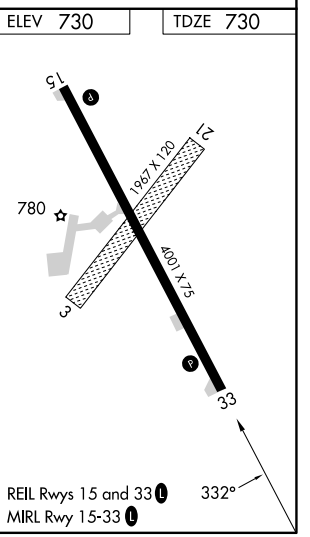


NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026