WAAS	APP CRS	Rwy Ldg	4002
CH 93630	179°	TDZE	538
W18A		Apt Elev	538

RNAV (GPS) RWY 18


SPARTA COMMUNITY-HUNTER FLD (SAR)


Baro-VNAV NA when using Scott AFB/Midamerica St Louis altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Scott AFB/Midamerica St Louis altimeter setting and increase all DA 68 feet and all MDA 80 feet, increase LNAV and circling Cat C/D visibility ¼ mile. Circling NA to Rwy 9/27.


NA

MISSED APPROACH: Climb to 1200 then climbing left turn to 2200 direct TOSSO and hold.

AWOS-3PT	ST. LOUIS APP CON	UNICOM
118.375	125.2 281.5	123.075 (CTAF) L

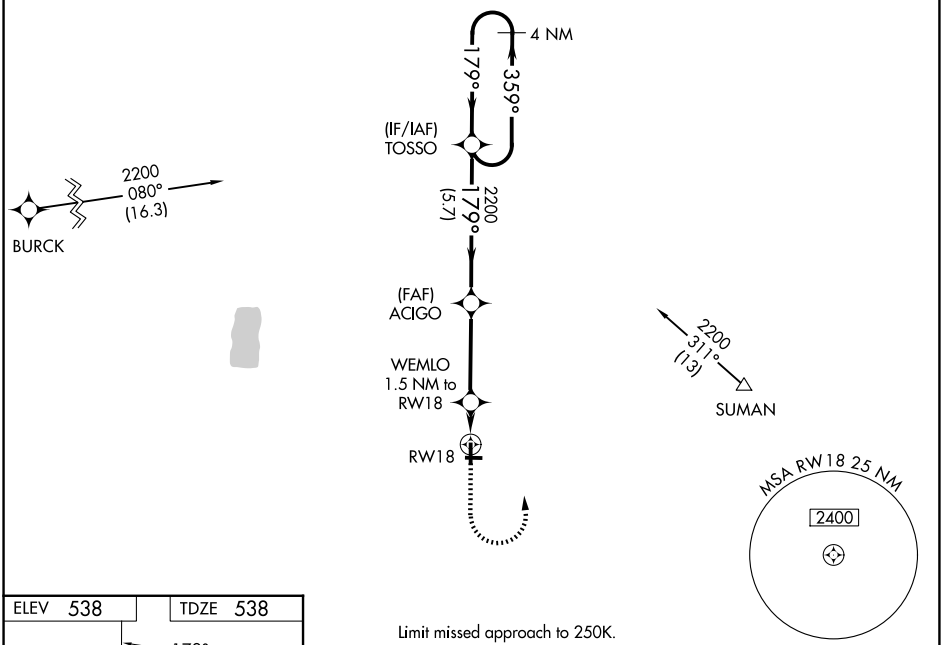

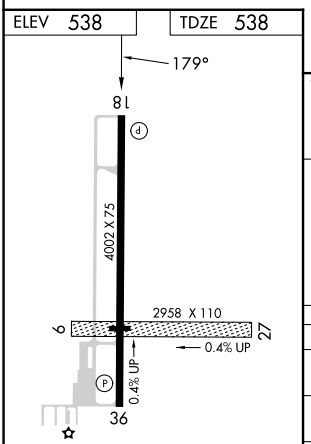

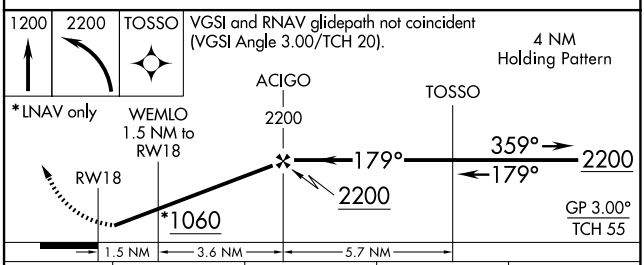

CATEGORY	A	B	C	D
LPV DA	788-1 250 (300-1)			
LNAV/VNAV DA	788-1 250 (300-1)			
LNAV MDA	880-1 342 (400-1)			
CIRCLING	980-1 442 (500-1)	1140-1 602 (700-1)	1140-1¾ 602 (700-1¾)	1320-2½ 782 (800-2½)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026