WAAS	APP CRS	Rwy Ldg	5402
CH 42904	159°	TDZE	207
W16A		Apt Elev	207

RNAV (GPS) RWY 16


HANOVER COUNTY MUNI (OFP)


RNP APCH - GPS.


When local altimeter setting not received, use RIC altimeter setting: increase LPV DA to 571 feet; increase LNAV/VNAV DA to 600 feet; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM. Baro-VNAV NA when using RIC altimeter setting. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -15°C or above 54°C. Rwy 16 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct BOCAB and left turn via 059° track to CALMI and left turn via 324° track to ISSIG and hold.

ASOS	POTOMAC APP CON	CLNC DEL	UNICOM
119.025	(001°-185°) 126.4 307.2 (186°-360°) 126.75 307.2	125.4	122.7 (CTAF) L

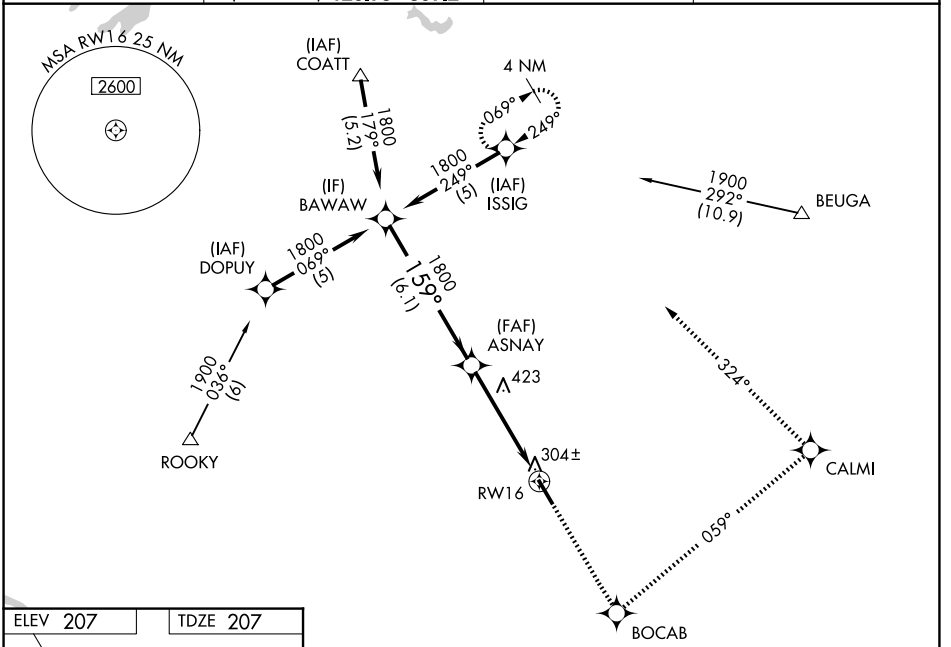

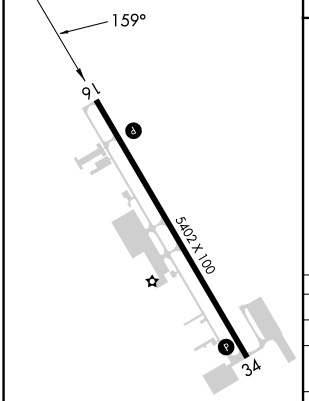

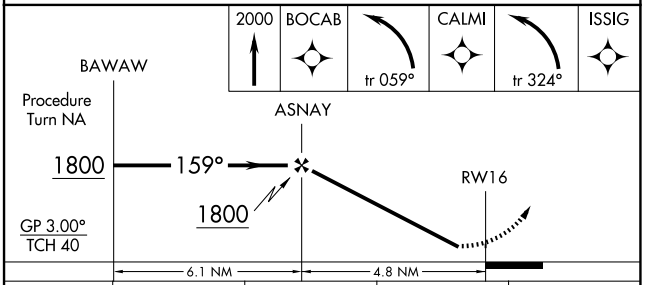

CATEGORY	A	B	C	D
LPV DA	535-1¼ 328 (400-1¼)			
LNAV/VNAV DA	564-1¼ 357 (400-1¼)			
LNAV MDA	700-1 493 (500-1)		700-1⅜ 493 (500-1⅜)	700-1½ 493 (500-1½)
CIRCLING	700-1 493 (500-1)		900-2 693 (700-2)	1020-2¾ 813 (900-2¾)

REIL Rwys 16 and 34 L
HIRL Rwy 16-34 L

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026