WAAS CH 97701 W10A	APP CRS 100°	Rwy Ldg 5003 TDZE 857 Apt Elev 868


RNAV (GPS) RWY 10
FAIRFIELD COUNTY (LHQ)


RNP APCH - GPS.

Rwy 10 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Rickenbacker Intl altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM. When Circling Rwy 28 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.


MISSED APPROACH: Climb to 2800 direct DIPAC and hold.


ASOS	COLUMBUS APP CON	CLNC DEL	UNICOM
118.375	134.0 279.6	121.65	122.725 (CTAF) L

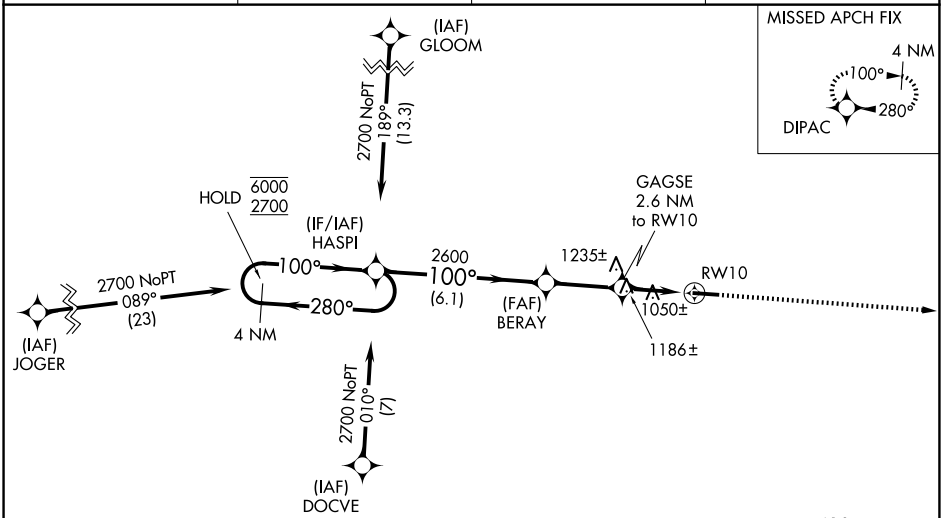



ELEV 868 TDZE 857



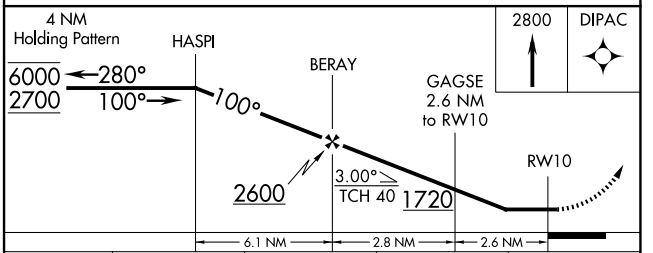

CATEGORY	A	B	C	D
LP MDA	1300-1	443 (500-1)	1300-1⅜ 443 (500-1⅜)	NA
LNAV MDA	1440-1	583 (600-1)	1440-1¾ 583 (600-1¾)	NA
CIRCLING	1500-1 632 (700-1)	1540-1 672 (700-1)	1620-2¼ 752 (800-2¼)	NA

REIL Rwys 10 and 28 L
MIRL Rwy 10-28 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026