
WAAS	APP CRS	Rwy Idg	6101
CH 86208	001°	TDZE	1421
W36A		Apt Elev	1421


RNAV (GPS) RWY 36
COLONEL JAMES JABARA (AAO)


DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1780 and all LPV visibilities ¼ SM; increase all MDAs 40 feet; increase LNAV Cats C and D visibilites ⅛ SM; increase Circling Cat D visibility ¼ SM. VDP NA with Wichita Dwight D Eisenhower Ntl altimeter setting.

MISSED APPROACH: Climb to 3600 direct HUKAM and hold.

ASOS	WICHITA APP CON	CLNC DEL	UNICOM
134.025	134.8 269.1	125.0	122.7 (CTAF) L

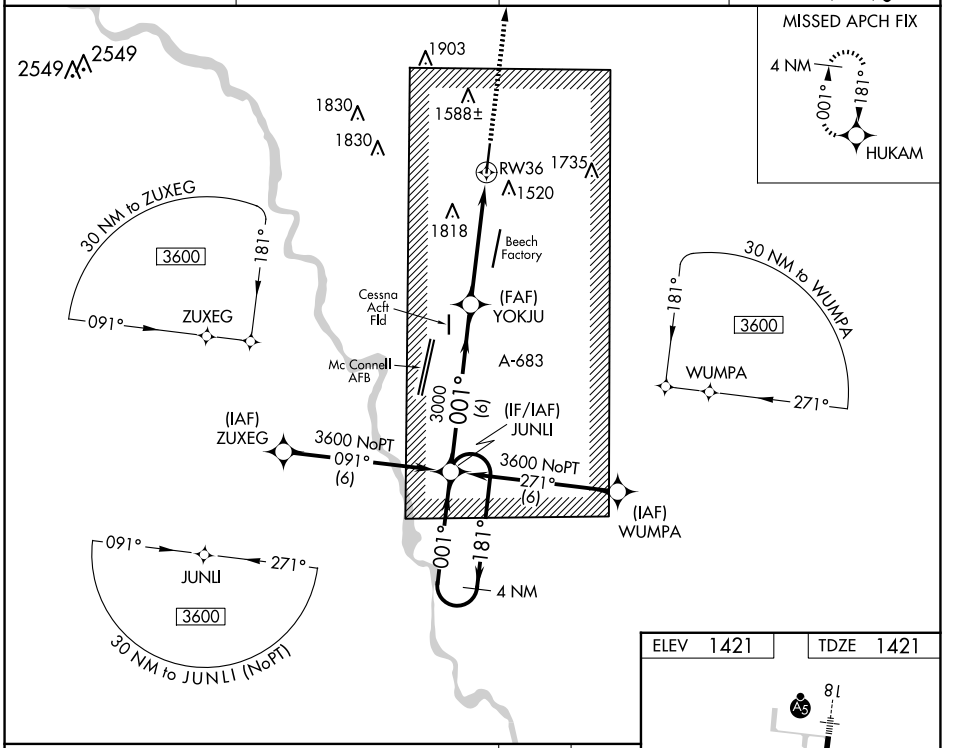

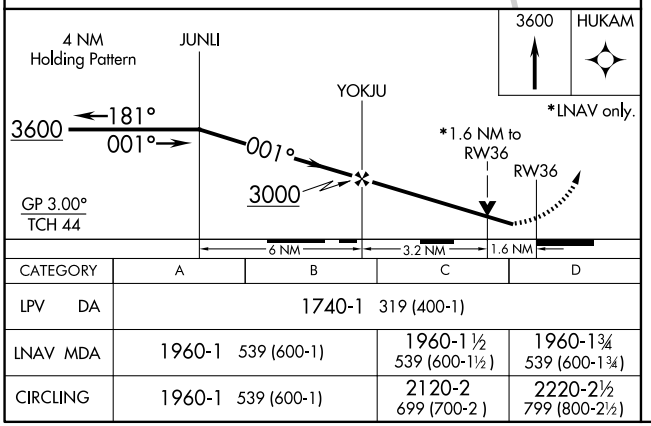

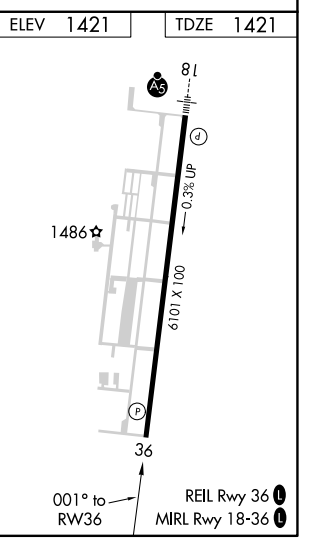

CATEGORY	A	B	C	D
LPV DA	1740-1 319 (400-1)			
LNAV MDA	1960-1 539 (600-1)		1960-1½ 539 (600-1½)	1960-1¾ 539 (600-1¾)
CIRCLING	1960-1 539 (600-1)		2120-2 699 (700-2)	2220-2½ 799 (800-2½)

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026